




## FIRE DEFENDER LED DOWNLIGHTS

Fire Defender LED Downlight Series provides 2 hour fire protection by utilization of non-combustible insulation within the fixture's double wall. This design prevents flames, toxic gases, and ignitable gases to pass through into the ceiling plenum making it a great choice for residential, multifamily, and commercial applications.

### FIRE RATED HIGHLIGHTS

- 2 hour fire rated enclosure.
- Use in insulated or non-insulated ceilings.
- Quick connect provided.
- Airtight (Per ASTM-E283)


### Non-Combustible Insulation

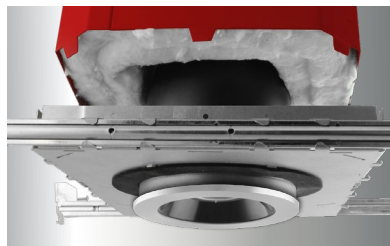

### Easy Installation



VERSATRIM

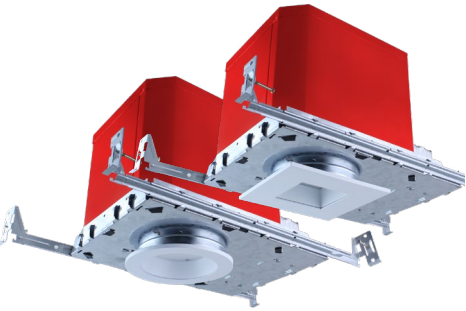

Lumens  
800 lm, 1100 lm


Aperture  
3", 4", 6"

Color Temperature  
2700K, 3000K, 3500K & 4000K

Interchangeable  
Baffle/Reflector, Trim



VERSATRIM ADJUSTABLE

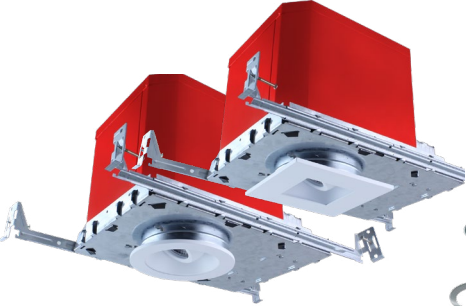

Lumen Package  
900 lm

Aperture  
4", 6"

Optical Distribution  
18°, 38°, 60°


Color Temperature  
2700K, 3000K, 3500K & 4000K

Adjustable  
0-30° Tilt, 360° Rotation

Interchangeable  
Reflector, Trim



PULL DOWN

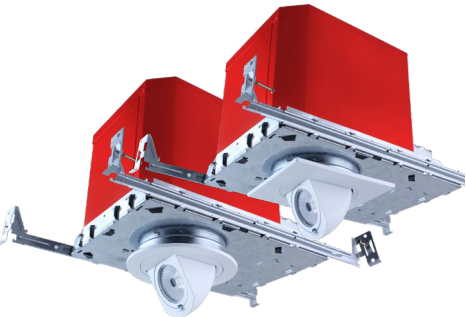

Lumen Package  
830 lm

Aperture  
4"

Optical Distribution  
18°, 38°


Adjustable  
65° Vertical drop from nadir, 360° Rotation

Color Temperature  
2700K, 3000K, 3500K & 4000K

Interchangeable  
No



BUILDERS' PLUS

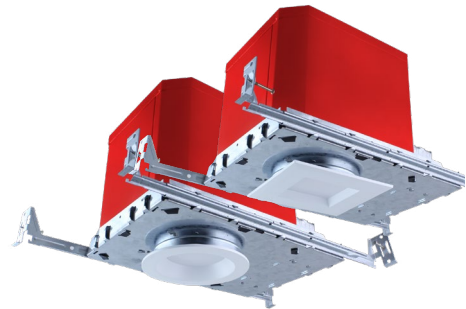

Lumen package  
1000 lm

Aperture  
4"

Color temperature  
3000K

Finishes

