


PRIME

ARCHITECTURAL LED DOWNLIGHT

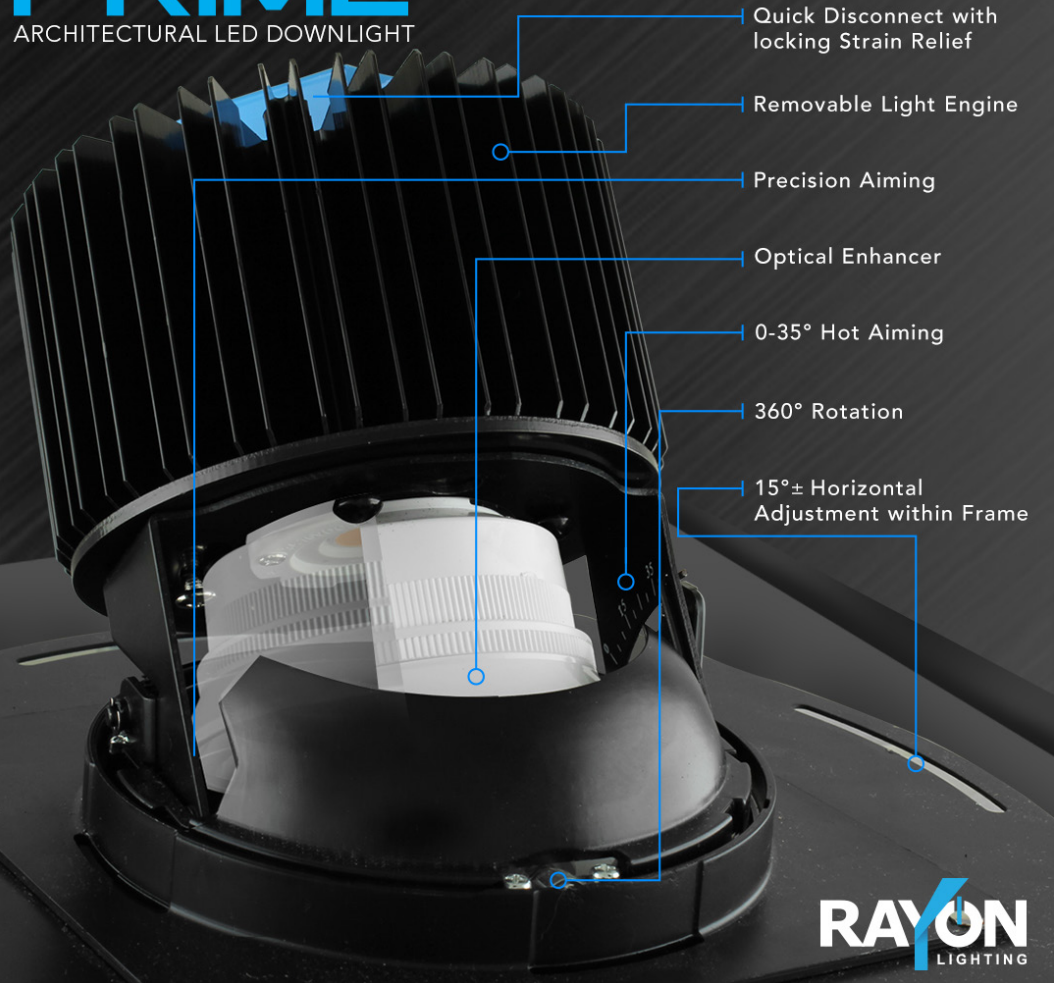

PRIME Series is the ideal product for architectural energy efficient lighting in commercial and residential applications.

Aperture Size: 4" & 6"

Lumen Range: 930-3600 Lm

Color Temperatures: 2700K, 3000K,
3500K & 4000K

CRI: 93+


R9: 65+

Optical Distribution: 18°, 30°, 50°, 80°

Filters: Frosted, Honeycomb, Solite filter

Adjustability: 360° horizontal rotation, Hot Aiming 0-35°, Collar Adjustment 15° ±

Trim Style: Flange/Flangeless in round or square shape

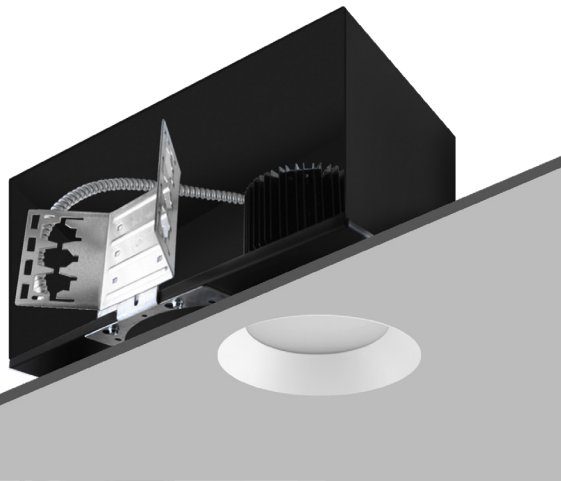

FEATURES


LUMENS

930 lm - 3600 lm

COLOR TEMPERATURE

2700K, 3000K, 3500K, 4000K

OPTICAL DISTRIBUTION



FILTERS

Frosted, Honeycomb & Solite filter

DIMMING


Available in 9 driver selections

- Intelligent Drive (ELV, TRIAC, 0-10 Dimming), 120-277V
- Lutron Hi-Lume Premier EcoSystem 0.1% w/ soft-on, fade to black
- Lutron Hi-Lume 1% Ecosystem with soft on, fade to black, 120V-277V

- Lutron Hi-Lume 5% Ecosystem, 120-277V
- Hi-Lume 1% 2-wire, 120V
- eldoLED Eco 1% Dim (0-10V), 120-277V
- eldoLED Solo 0.1% Dim (0-10V), 120-277V
- eldoLED Solo 0.1% Dim (DALI), 120-277V



DOWNLIGHT

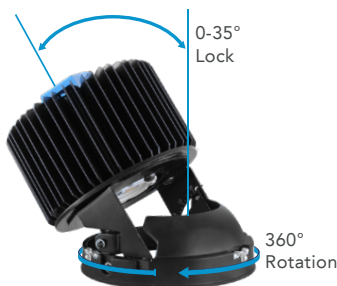

WALL WASH



ADJUSTABLE

FLANGE



Round Open



Square Open



Round Accent



Square Wall Wash

FLANGELESS



Round Open



Round Accent



Square Open



Square Accent

SELF FLANGE

Die Cast or Anodized



COLLAR ADJUSTMENT

15°±



FROSTED ACRYLIC

Standard



INTERCHANGEABLE

Optics, Filters, Trims



OPTICAL ENHANCER

Standard



RAYON
LIGHTING