



## VERSA COMMERCIAL

LED DOWNLIGHT

Versa Commercial LED Downlight is the ideal product for energy efficient lighting in Non-IC New Construction, Remodel and Retrofit commercial applications. Available with interchangeable reflectors and trims, with an assortment of color temperatures, lenses, filters, and dimmable driver selections.

Aperture Size:  
4" & 6"

Lumen Range:  
1045-4000 Lm

Color Temperatures:  
2700K, 3000K, 3500K, 4000K

CRI and R9:  
93+ CRI, 60+ R9


Optical Lens:  
18°, 30°, 50°, 70°

Filter Accessories:  
Solite, frosted, or honey comb

LED Life:  
50,000 Hours


LED Type:  
Cree LED

Versatility:  
Interchangeable reflectors/trims,  
optics & filters

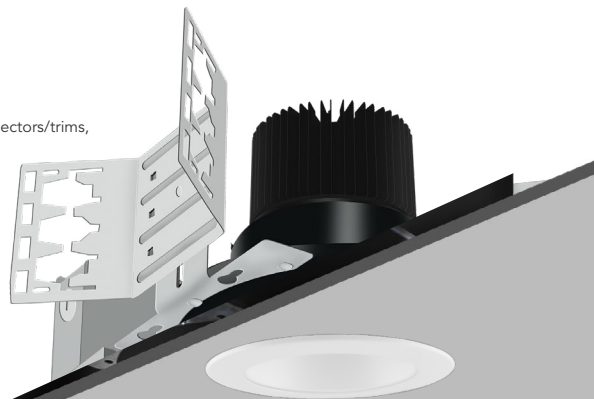

# VERSA COMMERCIAL


## Downlight

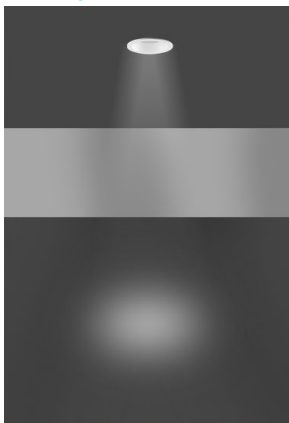


Lumens  
1045 lm - 4000 lm

Color Temperature  
2700K, 3000K, 3500K, 4000K

### Optical Distribution




## Single Sidekick Wall Wash

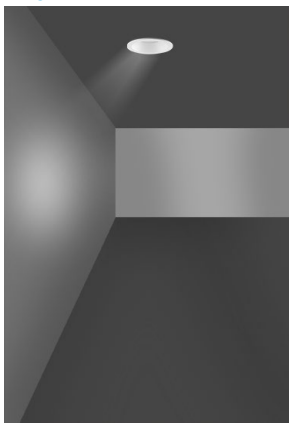


Lumens  
970 lm - 3855 lm

Color Temperature  
2700K, 3000K, 3500K, 4000K

### Optical Distribution




## Double Sidekick Wall Wash

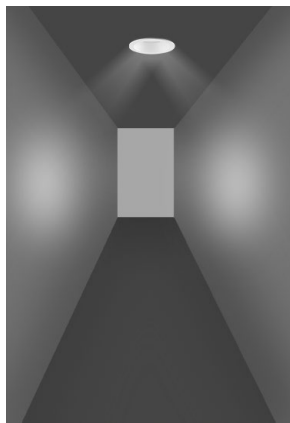

Lumens  
965 lm - 3855 lm

Color Temperature  
2700K, 3000K, 3500K, 4000K

### Optical Distribution



## Dimming

Available in 8 Driver Selections


- Intelligent Drive (ELV, TRIAC, 0-10 Dimming), 120-277V
- Lutron Hi-Lume Premier EcoSystem 0.1% w/ soft-on, fade to black, 120-277V
- Lutron Hi-Lume 1% Ecosystem with soft on, fade to black, 120V-277V
- Lutron Hi-Lume 5% Ecosystem, 120-277V
- Hi-Lume 1% 2-wire, 120V
- eldoLED Eco 1% Dim (0-10V), 120-277V
- eldoLED Solo 0.1% Dim (0-10V), 120-277V
- eldoLED Solo 0.1% Dim (DALI), 120-277V

## Housing


New construction, Remodel & Retrofit



## Intelligent Drive Standard



## Interchangeable Optics, Filters, Trims



Emergency Battery  
Optional emergency battery available for a minimum of 90 minutes with both integral or remote test switch in 800 or 1700 delivered lumens.

