



RFL4-SL-12


Architectural Square Luminaire

PROJECT: _____


MODEL #: _____

LOCATION: _____

CONTACT: _____



MOUNTING FEATURES

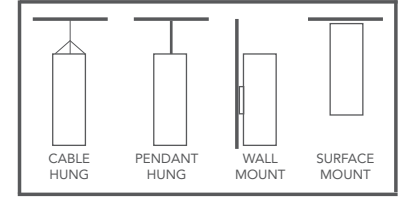

USE OF PRODUCT

The Architectural Square Luminaire Series may be used in hospitality, commercial, retail, and residential applications. This product will reduce energy consumption, emits little heat, and reduces cooling loads for added costs savings. Approximately 75% in energy savings compared to incandescent light source

HOUSING

Rugged aluminum housing.

ARCHITECTURAL SQUARE LUMINAIRE FEATURES

- Wattage/Lumens/Voltage: 12 Watts/800Lumens/120V or 17 Watts/1100Lumens/120V/277V
- Color Temperature: 2700K, 3000K, 3500K, or 4000K
- SDCM: 2 Step binning
- Color Rendering Index: 93 CRI Typical
- LED Life: 50,000 hours
- LED Type: Cree LED for maximum light output
- Versatility: Interchangeable baffle, reflector and trim ring
- Warranty: 5 Year Limited Warranty

LED DRIVER

Durable 120 Volt dimmable driver provides high power factor with optimum thermal management to prevent damage caused by high temperature.

DIMMING

The Architectural Square Luminaire Series is dimmable to 15% with standard 120 Volt electronic low voltage dimmers, various incandescent/magnetic low voltage dimmers, or to 5% with select dimmers.

MOUNTING

The Architectural Square Luminaire Series may be cable hung, stem mount, surface mount or wall mounted.

MODULE MECHANICS

- The Architectural Square Luminaire Series is constructed of a durable heat sink, baffle or reflector, trim ring, diffused lens, and Cree LEDs for optimum performance.
- Carefully designed heat sink keeps junction temperatures below unsuitable levels by keeping heat away from the LEDs
- Polycarbonate impact-resistant lens.
- Diffused lens allows for even light output, glare control, and conceals LEDs from view.

LABELS / COMPLIANCE

CSA classified
CSA classified for damp locations

ORDERING INFO

RFL	4	SL				
-----	---	----	--	--	--	--

Series	Diameter	Shape	Length	Watts/Lumens	Color Temp.	Finish
RFL	4 - 5"	SL - Square Luminaire	12 - 12" MTO - Made to order	8L - 12Watts/800 Lumens (120V) 11L - 17Watts/1100 Lumens (120V/277V)	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	BL - Black WH - White SL - Silver MTO - Made to order

Baffle or Reflector	Trim	Configuration	Mounting	Option	
SBLW - White SBLB - Black	SRLSN - Satin Nickel SRLB - Black SRLW - White SRLCH - Chrome SRLBZ - Bronze SRLH - Haze	STLW - White STLSN - Satin Nickel STLB - Black STLH - Haze STLBZ - Bronze	UL - Up-Light DL - Down-Light BD ¹ - Bi Direction	PH ² - Pendant Hung SC ³ - Single Cable TC ⁴ - Triple Cable QC ¹ - Quaduple Cable SM - Surface Mount WM - Wall Mount	018 ⁵ - 0-10V (800 Lumens) 011 ⁵ - 0-10V (1100 Lumens)

1 Bi- Directional available in Quadruple cable only (Ceiling Mount).
2 18" standard length, consult factory for other.
3 5ft standard cable length.
4 Triple cable only available in UL & BD configuration.
5 0-10V dimming available in uni-direction only.

Architectural Square Luminaire



www.rayonlighting.com
info@rayonlighting.com

tel: 323.446.2626
fax: 323.446.2606


Specification and product availability
subject to change without notice



RFL4-SL-12
Architectural Square
Luminaire

PROJECT: _____
MODEL #: _____
LOCATION: _____
CONTACT: _____

LED HEIGHT INSIDE SQUARE LUMINAIRE

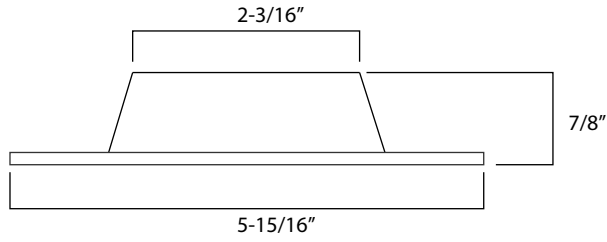

Architectural Square Luminaire

