


### MOUNTING FEATURES

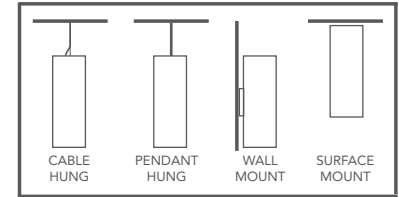

### Use Of Product

The Architectural Cylinder Adjustable Series may be used in hospitality, commercial, retail, and residential applications. This product will reduce energy consumption, emits little heat, and reduces cooling loads for added costs savings. Approximately 75% in energy savings compared to incandescent light source.

### Housing

Rugged aluminum housing.

### Architectural Cylinder Features

Wattage: 11 Watts  
 Lumens: 900 Lumens  
 Voltage: 120V standard; 120-277V (with optional 0-10V dimming driver)  
 Color Temperature: 2700K, 3000K, 3500K, or 4000K  
 R9 Value: 85  
 Beam Angle: 18°, 38°, 60°  
 Color Rendering Index: 93+ CRI  
 LED Life: 50,000 hours  
 Versatility: Interchangeable  
 Warranty: 5 Year Limited Warranty

### LED Driver

Durable 120V dimmable driver provides high power factor with the optimum thermal management to prevent damage caused by high temperature. Driver protections include: output open load, over-current and short circuit, and over temperature with auto recovery.

### Dimming

Available in 7 driver selections. Standard Triac/ELV, 120V. (019) 0-10V dimming in 900 lumens, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (LTE) Hi-Lume 1% 2-wire, 120V (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V.

### Mounting

The Architectural Cylinder Adjustable Series may be cable hung, stem mount, surface mount or wall mounted.

### Module Mechanics

- The Architectural Cylinder Adjustable Series provides 0-30° tilt and 360° Rotation.

- Carefully designed heat sink keeps junction temperatures below unsuitable levels by keeping heat away from the LEDs.  
 - Diffused lens allows for even light output, glare control, and conceals LED from view.

### Labels / Compliance

CSA Classified  
 CSA Classified for damp locations.

## ORDERING INFO

| RFL                   | 4A                    | CY                   |  |                                |  |  |   |
|-----------------------|-----------------------|----------------------|--|--------------------------------|--|--|---|
| Series                | Diameter              | Shape                | Length   | Watts/Lumens                   | Color Temp.  | Cylinder Finish  | Lens Holder Finish                      |
| RFL                   | 4A - 5" Diameter      | CY - Cylinder        | 12 - 12"<br>MTO - Made to order  | 9L - 11Watts/900 Lumens (120V) | 27 - 2700K<br>30 - 3000K<br>35 - 3500K<br>40 - 4000K | BL - Black<br>WH - White<br>SL - Silver<br>MTO - Made to order | HW - White<br>HB - Black<br>HS - Silver |
| Beam Angle            | Reflector             | Trim                 | Dimming  | Configuration                  | Mounting   | Options  |   |
| 18 - 18°              | 4ARLW - White         | <b>ROUND</b>         | Leave blank <sup>2</sup> - Triac/ELV                                   | DL - Down Light                | PH <sup>4</sup> - Pendant Hung                       | E - Emergency Back-up  |   |
| 38 <sup>1</sup> - 38° | 4ARLB - Black         | 4TLW - White         | 019 - 0-10V Dimming  |                                | SC <sup>5</sup> - Single Cable                       | SDT - Step Down Transformer                                    |   |
| 60 - 60°              | 4ARLCH - Chrome       | 4TLC - Copper        | LDE1 - Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming |                                | DC - Double Cable                                    | H - Honey comb   |   |
|                       | 4ARLH - Haze          | 4TLB - Black         | LDES - Lutron Hi-Lume 5% Ecosystem                                     |                                | TC - Triple Cable                                    | F - Frosted Filter   |   |
|                       | 4ARLSN - Satin Nickel | 4TLH - Haze          | LTE <sup>2</sup> - Hi-Lume 1% 2-wire                                   |                                | SM - Surface Mount                                   |  |   |
|                       | 4ARLC - Custom        | 4TLSN - Satin Nickel | EEI <sup>3</sup> - eldoLED Eco 1% Dim (0-10V)                          |                                | WM - Wall Mount                                      |  |   |
|                       |                       | 4TLBZ - Bronze       | EDIO <sup>3</sup> - eldoLED Solo 0.1% Dim (0-10V)                      |                                |  |  |   |
|                       |                       | 4TLCX - Custom       | EDID <sup>3</sup> - eldoLED Solo 0.1% Dim (DALI)                       |                                |  |  |   |

1. Standard beam angle.  
 2. 120V only.  
 3. Must specify logarithmic or linear eldoLED diver.  
 4. 18" Standard length, Consult factory for other  
 5. 5ft Standard cable length


**PROJECT:** \_\_\_\_\_

**MODEL #:** \_\_\_\_\_



**LOCATION:** \_\_\_\_\_

**CONTACT:** \_\_\_\_\_

**CABLE HUNG DIMENSION**




Cable hung canopy



3/64" Galvanized Cable Fuse Cut with Die Cast #1 Stop  
Available in 24", 36", 50", 72", 100", 120", & 150" Lengths  
7x7 Cable - MAX LOAD 270 lbs

**STEM MOUNT DIMENSION**

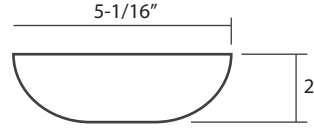

Stem mount canopy

