


PROJECT: _____


MODEL #: _____

LOCATION: _____

CONTACT: _____



MOUNTING FEATURES

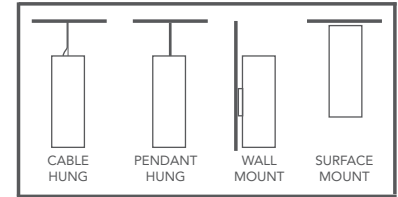

USE OF PRODUCT

The Versatrim Adjustable Square Luminaire Series may be used in hospitality, commercial, retail, and residential interior applications. This product will reduce energy consumption, emits little heat, and reduces cooling loads for added costs savings. Approximately 75% in energy savings compared to incandescent light source.

HOUSING

Rugged aluminum housing.

SQUARE LUMINAIRE FEATURES

- Wattage: 11 Watts
- Lumens: 900 Lumens
- Voltage: 120V standard; 120-277V (with optional 0-10V dimming driver)
- Color Temperature: 2700K, 3000K, 3500K, 4000K
- SDCM: 2 Step binning

- R9 Value: 85
- Color Rendering Index: 93 CRI Typical
- LED Life: 50,000 hours
- LED Type: Cree LED for maximum light output
- Versatility: Interchangeable baffle, reflector and trim ring
- Warranty: 5 Year Limited Warranty

DIMMING

Available in 11 driver selections. Standard Triac/ELV, 120V. (019) 0-10V dimming in 900 lumens, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (PEQ1) Lutron Hi-Lume Premier Ecosystem 1% w/soft on, fade to black dimming, (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (LTE) Lutron Hi-Lume 1% 2-wire, 120V. (L3DA) Hi-lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V.

MOUNTING

The Versatrim Adjustable Square Luminaire Series may be cable hung, stem mount, surface mount or wall mounted.

MODULE MECHANICS

The Versatrim Square Luminaire Series is constructed of a durable heat sink, baffle or reflector, trim ring, diffused lens, and Cree LEDs for optimum performance. Carefully designed heat sink keeps junction temperatures below unsuitable levels by dissipating heat away from the module. Diffused polycarbonate impact-resistant lens allows for even light output, glare control, and conceals LEDs from view. The Adjustable Square Luminaire Series provides 0-30° tilt and 360° Rotation.

LABELS / COMPLIANCE

CSA classified
CSA classified for damp locations

ORDERING INFO

| RFL | 4A | SL | | | | | |
|--------|--------------------|-----------------------|---------------------------------|--------------------------------|--|---|--|
| Series | Diameter | Shape | Length | Watts/Lumens | Color Temp. | Dimming | Luminaire Finish |
| RFL | 4A - 4" Adjustable | SL - Square Luminaire | 12 - 12" MTO - Made to order | 9L - 11Watts/900 Lumens (120V) | 27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K | Leave Blank ¹ - Triac/ELV 019 ² - 0-10V Dimming ID ² - Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive) PEQ0 ² - Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming PEQ1 ² - Lutron Hi-Lume Premier Ecosystem 1% w/soft on, fade to black dimming LDE1 ² - Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming LDE5 ² - Lutron Hi-Lume 5% Ecosystem LTE ^{1,2} - Lutron Hi-Lume 1% 2-wire L3DA - Hi-lume 1% EcoSystem/3-Wire L3D Driver EEI ^{2,3} - eldoLED Eco 1% Dim (0-10V) EDIO ^{2,3} - eldoLED Solo 0.1% Dim (0-10V) EDID ^{2,3} - eldoLED Solo 0.1% Dim (DALI) | BL - Black WH - White SL - Silver MTO - Made to order |

| Lens Holder Finish | Beam Angle | Reflector | Trim | Configuration | Mounting | Options |
|--------------------|-----------------------|-----------------------|-----------------------|-----------------|--------------------------------|-----------------------------|
| HW - White | 18 - 18° | 4ARLW - White | SQUARE | DL - Down Light | PH ⁵ - Pendant Hung | E - Emergency Back-up |
| HB - Black | 38 ⁴ - 38° | 4ARLB - Black | 4STLW - White | | SC ⁶ - Single Cable | SDT - Step Down Transformer |
| HS - Silver | 60 - 60° | 4ARLCH - Chrome | 4STLB - Black | | DC - Double Cable | H - Honey comb |
| | | 4ARLH - Haze | 4STLH - Haze | | TC - Triple Cable | F - Frosted Filter |
| | | 4ARLSN - Satin Nickel | 4STLSN - Satin Nickel | | SM - Surface Mount | |
| | | 4ARLC - Custom | 4STLCK - Custom | | WM - Wall Mount | |

1. 120V only.
 2. Requires dedicated Rayon housing.
 3. Must specify logarithmic or linear eldoLED driver.
 4. Standard beam angle.
 5. 18" Standard length, Consult factory
 6. 5' Standard cable length