



# RFL4A-SL-8

SQUARE LUMINAIRE LED ADJUSTABLE

**PROJECT:** \_\_\_\_\_


**MODEL #:** \_\_\_\_\_

**LOCATION:** \_\_\_\_\_


**CONTACT:** \_\_\_\_\_



## DIMENSIONS



## MOUNTING FEATURES

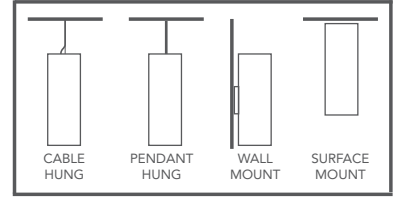

### USE OF PRODUCT

The Versatrim Adjustable Square Luminaire Series may be used in hospitality, commercial, retail, and residential interior applications. This product will reduce energy consumption, emits little heat, and reduces cooling loads for added costs savings. Approximately 75% in energy savings compared to incandescent light source.

### HOUSING

Rugged aluminum housing.

### ARCHITECTURAL SQUARE LUMINAIRE FEATURES

- Wattage: 11 Watts
- Lumens: 900 Lumens
- Voltage: 120V standard; 120-277V (with optional 0-10V dimming driver)
- Color Temperature: 2700K, 3000K, 3500K, 4000K
- SDCM: 2 Step binning
- R9 Value: 85
- Color Rendering Index: 93 CRI Typical
- LED Life: 50,000 hours
- LED Type: Cree LED for maximum light output
- Versatility: Interchangeable baffle, reflector and trim ring
- Warranty: 5 Year Limited Warranty

### DIMMING

Standard Triac/ELV, 120V. (019) 0-10V dimming in 900 lumens, 120-277V.

### MOUNTING

The Versatrim Adjustable Square Luminaire Series may be cable hung, stem mount, surface mount or wall mounted.

### MODULE MECHANICS

The Versatrim Square Luminaire Series is constructed of a durable heat sink, baffle or reflector, trim ring, diffused lens, and Cree LEDs for optimum performance. Carefully designed heat sink keeps junction temperatures below unsuitable levels by dissipating heat away from the module. Diffused polycarbonate impact-resistant lens allows for even light output, glare control, and conceals LEDs from view. The Adjustable Square Luminaire Series provides 0-30° tilt and 360° Rotation.

### LABELS / COMPLIANCE

CSA classified  
CSA classified for damp locations

SQUARE LUMINAIRE ADJUSTABLE

## ORDERING INFO

RFL	4A	SL							
Series	Diameter	Shape	Length	Watts/Lumens	Color Temp.	Dimming	Luminaire Finish	Lens Holder Finish	
RFL	4A - 4" Adjustable	SL - Square Luminaire	8 - 8" MTO - Made to order	9L - 11Watts/900 Lumens (120V)	35- 3500K 40 - 4000K	Blank - TRIAC/ELV (120V) 019 - 0-10V (900 lm, 120-277V)	BL - Black WH - White SL - Silver MTO - Made to order	HW - White HB - Black HS - Silver	

Beam Angle	Reflector	Trim	Configuration	Mounting	Options
18 - 18°	4ARLW - White	<b>SQUARE</b>	DL - Down Light	PH <sup>5</sup> - Pendant Hung	E - Emergency Back-up
38 <sup>1</sup> - 38°	4ARLB - Black	4STLW - White		SC <sup>6</sup> - Single Cable	SDT - Step Down Transformer
60 - 60°	4ARLCH - Chrome	4STLB - Black		DC - Double Cable	H - Honey comb
	4ARLH - Haze	4STLH - Haze		TC - Triple Cable	F - Frosted Filter
	4ARLSN - Satin Nickel	4STLSN - Satin Nickel		SM - Surface Mount	
	4ARLC - Custom	4STLCK - Custom		WM - Wall Mount	

1. Standard beam angle.  
2. 120V only.  
3. Requires dedicated Rayon housing.  
4. Must specify logarithmic or linear eldoLED diver.  
5. 18" Standard length, Consult factory  
6. 5' Standard cable length