



# RFL4E-CY-12

## VERSATRIM PULL DOWN CYLINDER

### JOB INFORMATION

Type: \_\_\_\_\_  
 Catalog No: \_\_\_\_\_  
 Project Name: \_\_\_\_\_  
 Comments: \_\_\_\_\_  
 Prepared by: \_\_\_\_\_

RFL4E-CY-12

### FEATURES

#### USE OF PRODUCT

The Architectural Cylinder Pull Down Series may be used in hospitality, commercial, retail, and residential applications. This product will reduce energy consumption, emits little heat, and reduces cooling loads for added costs savings. Approximately 75% in energy savings compared to incandescent light source.

#### HOUSING

Rugged aluminum housing.

#### ARCHITECTURAL CYLINDER FEATURES

Wattage: 12 Watts  
 Lumens: 830 Lumens  
 Voltage: 120V  
 Color Temperature: 2700K, 3000K, 3500K, or 4000K  
 R9 Value: 85  
 Color Rendering Index: 93 CRI Typical  
 LED Life: 50,000 hours  
 LED type: Cree LED for maximum light output  
 Versatility: Interchangeable optics available in 19° and 38°. 365° horizontal rotations; 65° vertical drop from nadir.  
 Warranty: 5 Year Limited Warranty

#### LED DRIVER

Durable 120 Volt dimmable driver provides high power factor with optimum thermal management to prevent damage caused by high temperature.

#### DIMMING

The Architectural Cylinder Pull Down Series is dimmable to 15% with standard 120 Volt electronic low voltage dimmers, various incandescent/magnetic low voltage dimmers, or to 5% with select dimmers.

#### MOUNTING

The Architectural Cylinder Pull Down Series may be cable hung, stem mount, surface mount or wall mounted.

#### MODULE MECHANICS

- The Architectural Cylinder Pull Down Series provides 359° horizontal rotation within module and 65° vertical drop from nadir. - Carefully designed heat sink keeps junction temperatures below unsuitable levels by keeping heat away from the LEDs.  
 - Diffused lens allows for even light output, glare control, and conceals LED from view.

#### LABELS / COMPLIANCE

CSA Classified  
 CSA Classified for damp locations.

### ORDERING INFO

SERIES	DIAMETER	SHAPE	LENGTH	WATT/LUMENS	COLOR TEMPERATURE	CYLINDER FINISH	PULL DOWN FINISH
RFL	4E - 4" Pull Down	CY - Cylinder	12 - 12" MTO - Made to order	8L - 12W/ 830lm (120V)	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	BL - Black WH - White SL - Silver MTO - Made to order	BL - Black W - White SN - Satin Nickel BZ - Bronze


BEAM ANGLE	CONFIGURATION	MOUNTING	OPTION
18 - 18° 38 - 38°	DL - Down Light	PH <sup>1</sup> - Pendant Hung SC <sup>2</sup> - Single Cable DC - Double Cable TC - Triple Cable SM - Surface Mount WM - Wall Mount	018 - 0-10V Dimming (800lm)

**Notes**  
 1. 18" Standard length, Consult factory  
 2. 5' Standard cable length

# RFL4E-CY-12


## VERSATRIM PULL DOWN CYLINDER

### DIMENSIONS





### MOUNTING


#### CABLE HUNG DIMENSION




Cable Hung Canopy



#### STEM MOUNT DIMENSION

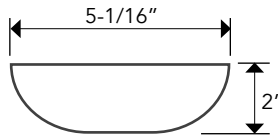

Stem Mount Canopy

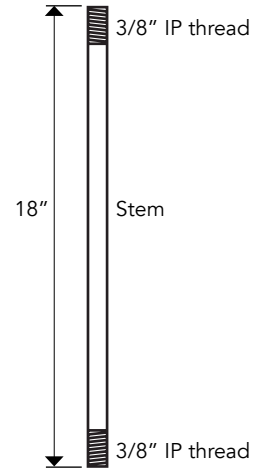

3/64" Galvanized Cable Fuse Cut with Die Cast #1 Stop  
Available in 24", 36", 50", 72", 100", 120", & 150" Lengths  
7x7 Cable - MAX LOAD 270 lbs