



RFL4E-CY-16

VERSATRIM PULL DOWN CYLINDER

JOB INFORMATION

Type: _____
 Catalog No: _____
 Project Name: _____
 Comments: _____
 Prepared by: _____

RFL4E-CY-16

FEATURES

USE OF PRODUCT

The Architectural Cylinder Pull Down Series may be used in hospitality, commercial, retail, and residential applications. This product will reduce energy consumption, emits little heat, and reduces cooling loads for added costs savings. Approximately 75% in energy savings compared to incandescent light source.

HOUSING

Rugged aluminum housing.

ARCHITECTURAL CYLINDER FEATURES

Wattage: 12 Watts
 Lumens: 830 Lumens
 Voltage: 120V
 Color Temperature: 2700K, 3000K, 3500K, or 4000K
 R9 Value: 85
 Color Rendering Index: 93 CRI Typical
 LED Life: 50,000 hours
 LED type: Cree LED for maximum light output
 Versatility: Interchangeable optics available in 19° and 38°. 365° horizontal rotations; 65° vertical drop from nadir.
 Warranty: 5 Year Limited Warranty

LED DRIVER

Durable 120 Volt dimmable driver provides high power factor with optimum thermal management to prevent damage caused by high temperature.

DIMMING

The Architectural Cylinder Pull Down Series is dimmable to 15% with standard 120 Volt electronic low voltage dimmers, various incandescent/magnetic low voltage dimmers, or to 5% with select dimmers.

MOUNTING

The Architectural Cylinder Pull Down Series may be cable hung, stem mount, surface mount or wall mounted.

MODULE MECHANICS

- The Architectural Cylinder Pull Down Series provides 359° horizontal rotation within module and 65° vertical drop from nadir. - Carefully designed heat sink keeps junction temperatures below unsuitable levels by keeping heat away from the LEDs.
 - Diffused lens allows for even light output, glare control, and conceals LED from view.

LABELS / COMPLIANCE

CSA Classified
 CSA Classified for damp locations.

ORDERING INFO

| SERIES | DIAMETER | SHAPE | LENGTH | WATT/LUMENS | COLOR TEMPERATURE | CYLINDER FINISH | PULL DOWN FINISH |
|--------|-------------------|---------------|---------------------------------|------------------------|--|--|---|
| RFL | 4E - 4" Pull Down | CY - Cylinder | 16 - 16" MTO - Made to order | 8L - 12W/ 830lm (120V) | 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K | BL - Black WH - White SL - Silver MTO - Made to order | BL - Black W - White SN - Satin Nickel BZ - Bronze |


| BEAM ANGLE | CONFIGURATION | MOUNTING | OPTION |
|----------------------|-----------------|---|-----------------------------|
| 18 - 18° 38 - 38° | DL - Down Light | PH ¹ - Pendant Hung SC ² - Single Cable DC - Double Cable TC - Triple Cable SM - Surface Mount WM - Wall Mount | 018 - 0-10V Dimming (800lm) |

Notes
 1. 18" Standard length, Consult factory
 2. 5' Standard cable length

RFL4E-CY-16


VERSATRIM PULL DOWN CYLINDER

DIMENSIONS


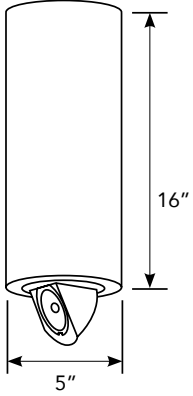


MOUNTING


CABLE HUNG DIMENSION




Cable Hung Canopy



STEM MOUNT DIMENSION

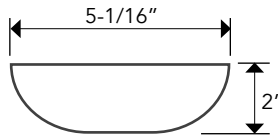

Stem Mount Canopy

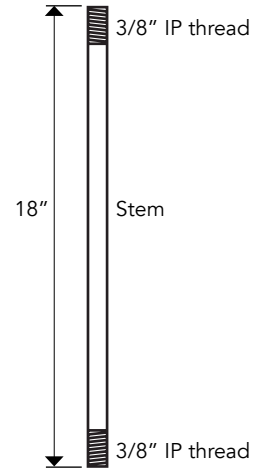

3/64" Galvanized Cable Fuse Cut with Die Cast #1 Stop
Available in 24", 36", 50", 72", 100", 120", & 150" Lengths
7x7 Cable - MAX LOAD 270 lbs