

3" RHL3R-ICAT 3" IC Air-Tight Remodel LED Housing

PROJECT: _____
 MODEL #: _____
 LOCATION: _____
 CONTACT: _____

USE OF PRODUCT

The RHL3R-ICAT is the ideal product for general purpose recessed LED housing for residential, commercial, hospitality, health care, restaurant and retail applications. This product is compatible with the Versatrim RFL3 Series in round or square in various baffle, reflector, and trim ring color selections to achieve a particular look.

CONSTRUCTION

- **Minimum Clearance** "IC" or insulated ceiling housings are rated for direct contact with insulation. No minimum clearance is required.
- **CEILING THICKNESS** Housing adjusts from 1/2" to 1 1/2"
- **BAR HANGERS** Bar Hangers are adjustable from 13-5/8" to 25" and can be repositioned to 90°.
- **JUNCTION BOX** Junction box is listed for through branch circuit wiring and contains seven 7/8 knockouts and four ROMEX pryouts with strain relief.
- **PLASTER FRAME** Galvanized steel construction
- **CONNECTION** Quick connect provided for easy connection to Versatrim RFL3 Series LED module to meet non-screw base socket requirements per California Title 24.

EMERGENCY

Optional emergency back-up may be ordered separately. Unit operates for 90 minutes with LED modules up to 20 Watts and is Damp location rated, 120/277AC operational.

MODULE COMPATIBILITY



RHL3R-ICAT is compatible with the Versatrim RFL3 Series in round or square in various baffle, reflector, and trim ring color selections to achieve appearance of choice.

LABELS/COMPLIANCE

cUL listed for Wet location
 Certified under ASTM-283 for Air-Tight Construction
 Title 24 Compliant




DIMENSIONS

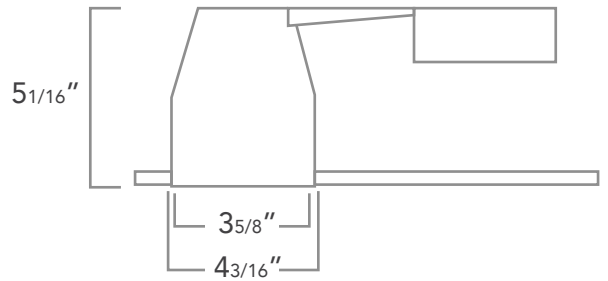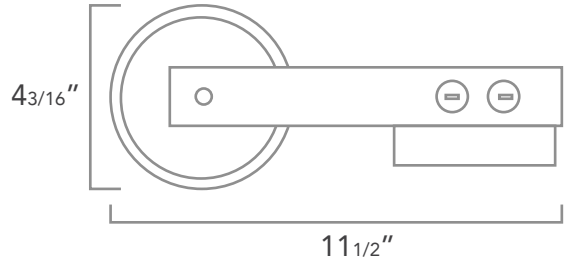

RHL3R-ICAT - 3" IC AIR-TIGHT, REMODEL LED HOUSING



ORDERING INFO



RHL3R-ICAT- 3" IC Air Tight Remodel LED Housing

- EM - Emergency Back-Up
- 010 - 0-10V Driver
- 277 SDT- 277V Step Down Transformer
- 347 SDT- 347V Step Down Transformer