



# T1012LED-AL

SONOMA I

## JOB INFORMATION

Type: \_\_\_\_\_  
 Catalog No: \_\_\_\_\_  
 Project Name: \_\_\_\_\_  
 Comments: \_\_\_\_\_  
 Prepared by: \_\_\_\_\_

T1012LED-AL

### FEATURES

#### USE OF PRODUCT

The intended use of this product is for retail, restaurant, lobby, or any interior commercial space.

#### HOUSING

Rugged die cast aluminum housing with external heatsink.

#### FINISH

Matt-finished, architectural powdercoat over a precise chromate conversion coating. Consult factory for custom architectural finishes.

#### OPTICS

- Polished aluminum reflector with no bottom lens, PD lens or FD lens.

#### LED

High output LEDs offer a minimum estimated operating life of 50,000 hours in 2700K, 3000K, 3500K, 4000K, or 5000K (standard) with CRI>80. LEDs placed on high performance aluminum heatsink for reduced junction temperatures and extended life.

#### DRIVER

Canopy ceiling remote mount driver. Durable and long lasting LED driver operates at 120-277V and boasts a 90% power factor at 50 to 60 Hz. Driver provides dual dimming: Triac (forward-phase or eading-edge)/ELV (reverse-phase or trailing-edge) and 0-10V Dimming Constant Current. Driver protections includes: Output open load, over-current and short-circuit, and over-temperature with auto recovery.

#### MOUNTING

Available in Single Cable or Stem mount

#### EPA

1.102 ft<sup>2</sup>

#### ACCESSORIES

Consult Factory.

#### LISTINGS/COMPLIANCE

- CSA Listed



### ORDERING INFO

SERIES	WATT/LUMENS	VOLTAGE	COLOR TEMPERATURE	HOUSING FINISH	REFLECTOR	REFLECTOR FINISH	MOUNTING
T1012LED	10 - 10W/824lm	UNV - 120V-277V	27K - 2700K	GY <sup>1</sup> - Gray	AL - Aluminum	ST - Standard	SC <sup>3</sup> - Single Cable
	20 - 20W/1684lm		30K - 3000K	MTO <sup>2</sup> - Made to order			
	30 - 30W/2499lm		35K - 3500K				
			40K - 4000K				
			50K - 5000K				

#### LENS OPTIONS

- PDL<sup>5</sup> - Partially diffused outer diameter lens
- FDL - Fully diffused lens
- NL - No lens

#### OPTIONS

- EM - Emergency battery (Remote mount)

#### Notes


- Standard finish
- RAL number required
- Standard cable length 5ft.
- 18" Standard length, consult factory for other.
- Standard lens



# T1012LED-AL

SONOMA I

## DIMENSIONS

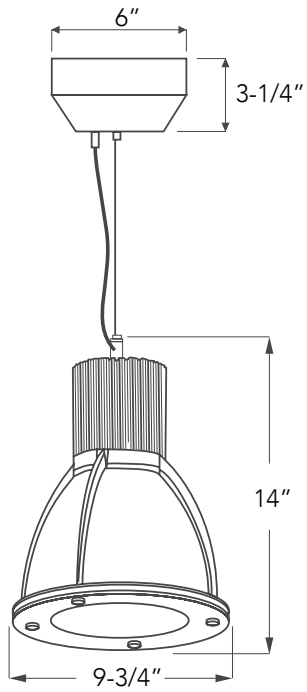

## ASSEMBLY/CABLE INFORMATION

