




JOB INFORMATION	TYPE:
	CATALOG NO.
	PROJECT NAME:
	COMMENTS:
	PREPARED BY:

T1017LED-PA

SONOMA III (REMOTE DRIVER)

DIMENSIONS

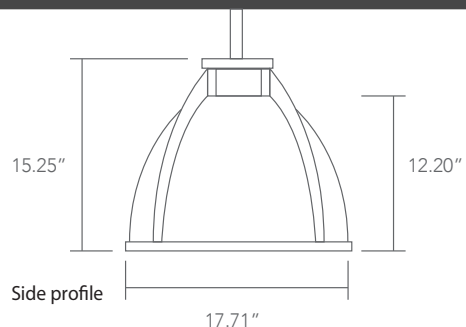

FEATURES

USE OF PRODUCT

The intended use of this product is in showroom, restaurant, lobby, retail, or any interior commercial space.

HOUSING

Rugged die cast aluminum housing and extrusion aluminum.

FINISH

Matt-finished, architectural powdercoat over a precise chromate conversion coating. Consult factory for made to order architectural finishes.

OPTICS

- Available in Prismatic Acrylic.
- Diffused or clear glass lens available upon request.

LED

High output LEDs offer a minimum estimated operating life of 50,000 hours in 3000K, 3500K, 4000K, or 5000K (standard) with CRI>83. LEDs placed on high performance aluminum heatsink for reduced junction temperatures and extended life.

DRIVER

Durable and long lasting LED driver operates at 120-277V and boasts a 90% power factor at 50 to 60 Hz. Driver provides dual dimming: Triac (forward-phase or leading-edge)/ELV (reverse-phase or trailing-edge) and 0-10V Dimming Constant Current. Driver protections includes: Output open load, over-current and short-circuit, and over-temperature with auto recovery. Step down transformer may be utilized for 480V or 347V applications.

MOUNTING

Available in pendant hung, single cable, or double cable.

LISTINGS/COMPLIANCE

- CSA

ACCESSORIES

Consult Factory.

ORDERING INFO

T1017LED						
Series	Watt/lumens	Voltage	Color Temperature	Housing Finish	Reflector	Reflector Finish
T-SERIES LED	12 - 12W/1034 lm	UNI12-120V-277V	30 - 3000K	GY ³ - Gray MTO ⁴ - Made to order	PA - Prismatic Acrylic	ST - Standard MTO - Made to Order
	20 - 20W/2001 lm		347 ¹ - 347V			
	30 - 30W/2852 lm		480 ¹ - 480V			
	45 - 45W/4158 lm		40 - 4000K			
	57 - 57W/5070 lm		50 ² - 5000K			

Mounting	Lens Options	Options
SM ⁵ - 18" Stem mount SC ⁶ - Single cable DC - Double cable	PDL ⁷ - Partially diffused outer diameter lens FDL - Fully diffused lens NL - No Lens	SDT - Step down transformer EM - Emergency battery (remote mount)

Notes:

1. Step down transformer required
2. Standard color temperature
3. Standard finish
4. RAL number required
5. 18" standard length, consult factory for other
6. Standard cable length 5ft
7. Standard lens


T1017LED

SONOMA III (REMOTE DRIVER)

JOB INFORMATION	TYPE:
	CATALOG NO.:
	PROJECT NAME:
	COMMENTS:
	PREPARED BY:

T1017LED-PA

CABLE HUNG DIMENSION

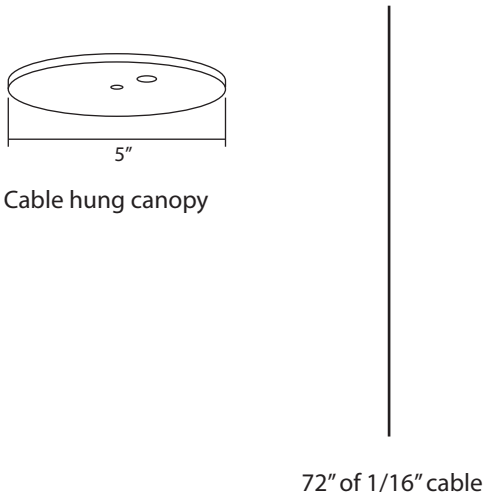

STEM MOUNT DIMENSION

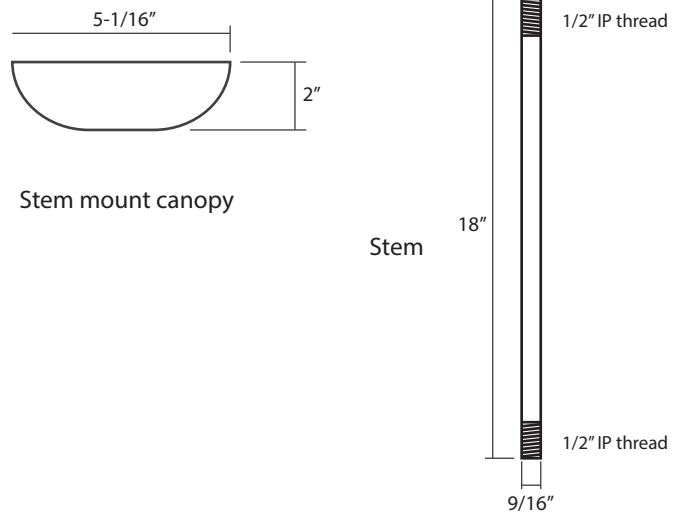


ILLUSTRATION OF ASSEMBLY

