



T1085LEDB-WS210

LED HIGHBAY WITH COLOR TEMPERATURE SELECTABLE

JOB INFORMATION

Type: _____
Catalog No: _____
Project Name: _____
Comments: _____
Prepared by: _____

T1085LED-G2

USE OF PRODUCT

The intended use of this product is for interior warehouses, gymnasiums, food service areas, grocery stores, or any commercial or industrial applications.

CONSTRUCTION

Die-cast aluminum fixture with sealed lens for wet location applications.

FINISH

Black matt-finish, architectural powder coat over a precise chromate conversion coating. Consult factory for made to order architectural finishes.

OPTICS

Available in clear prismatic acrylic or polished aluminum reflector. Optional conical drop lens or smooth flat lens available upon request.

ELECTRICAL

≥0.9 Power Factor
<20% Total Harmonic Distortion
120-277v, Optional 347/480V; 50/60hz
-40°C Min. Temperature
+55°C Max. Temperature
CRI: 72

LED

Available in 4000K and 5000K with CRI > 70.
Optional photocell or motion sensor (consult factory for setting capabilities) available upon request for further energy savings and security measures.

MOUNTING

Standard installation includes hook mount and optional surface mount with U-bracket. May be stem mounted if remove hook (pendant may be provided by Rayon Lighting or others).

DRIVER

Universal 120-277V driver with 0-10V dimming. Driver allows for lumen selectability.

WARRANTY

5-year limited warranty.

LISTING

UL-wet location.

T1085LEDB-WS210		4000K	5000K
Wattage Percentage	Watts	Lumens	Lumens
100%	210W	32000	30500
80%	168W	26500	25000
60%	126W	21000	20000
40%	84W	14500	14000


ORDERING INFORMATION

Series	Wattage	Color Temperature	Voltage
T1085LEDB	WS210 - Wattage Selectable (84W, 126W, 168W, 210W) S84W - Wattage Set at 84W S126W - Wattage Set at 126W S168W - Wattage Set at 168W S210W - Wattage Set at 210W	CTS - Color Temperature Selectable (4000K, 5000K) S40K - Color Temperature Set at 4000K S50K - Color Temperature Set at 5000K	UNV - 120V-277V
Finish	Mounting	Reflector	Options
B - Black MTO - Made To Order	H - Hook SM - Stem Mount USB - U Bracket Surface Mount	Blank - None AL - Aluminum Reflector	EM25W - Emergency Battery (Remote Mount) MS - Motion Sensor

T1085LEDB-WS210

LED HIGHBAY WITH COLOR TEMPERATURE SELECTABLE

DIMENSIONS

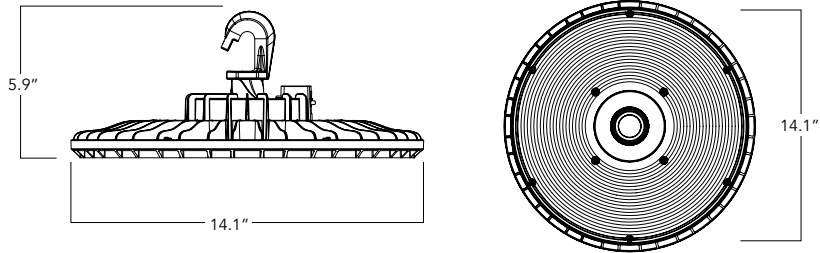

MOUNTING



Hook Mount



Stem Mount



U-Bracket Mount

REFLECTOR



Aluminum Reflector