




T621LED

12" POLYCARBONATE LED WALL PACK

JOB INFORMATION	TYPE:
	CATALOG NO.:
	PROJECT NAME:
	COMMENTS:
	PREPARED BY:

DIMENSIONS



FEATURES



USE OF PRODUCT

The intended use of this product is for any outdoor commercial or industrial building accent decorative wall mount, public access area, recreation areas, stairwell & corridor applications.

HOUSING

Rugged die cast aluminum housing. Front housing is hinged with stainless steel hinged pins and safety cable for easy access to fixture compartment. Top and side coin plugs for easy conduit access.

FINISH

Textured architectural bronze powdercoat finish over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

OPTICS

Specular anodized aluminum reflector with vandal resistant polycarbonate prismatic lens. Lens is sealed by a one-piece silicon gasket prohibits entrance outside contaminants.

LED

High output LEDs offer a minimum estimated operating life of 50,000 hours in 3000K, 3500K, 4000K, or 5000K (standard) with CRI>83. LEDs placed on high performance aluminum heatsink for reduced junction temperatures and extended life.

DRIVER

Durable and long lasting LED driver operates at 120-277V and boasts a 90% power factor at 50 to 60 Hz with 0-10V Dimming Constant Current. Driver protections includes: Output open load, over-current and short-circuit, and over-temperature with auto recovery. Step down transformer may be utilized for 480V or 347V applications.


MOUNTING

Mounted over a 4" recessed outlet box or use a 1/2" surface conduit.


LISTINGS/COMPLIANCE

- CEC compliant emergency driver
- CSA - Suitable for wet location

T621LED- Knock-Out Locations

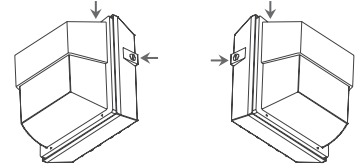

Feed through conduit access



ORDERING INFO

Series	Watt/lumens	Voltage	Color Temperature	Finish	Options
T-SERIES LED	10 - 10W/1050 lm 18 - 18W/1890 lm 30 - 30W/3150 lm 45 - 45W/4725 lm 57 - 57W/5985 lm	UNI12-120V-277V 347 - 347V 480 - 480V	30 - 3000K 35 - 3500K 40 - 4000K 50 ¹ - 5000K	BZ ² - Bronze MTO ² - Made to order	PC1 - Photocell 120V PC2 - Photocell 277V MS - Motion Sensor SDT - Step down transformer EM - Emergency battery SP10 - Surge protection 10KV

Wireless Control



Notes:

1. Standard color temperature.
2. Standard finish.
3. RAL number required.

- LPL - Lutron wireless radio module and sensor (low 8')
- LPM - Lutron wireless radio module and sensor (medium 20')
- LPF - Lutron wireless radio module only

PIR Height

LPL - Lutron wireless radio module and sensor (low mounting height 8ft)

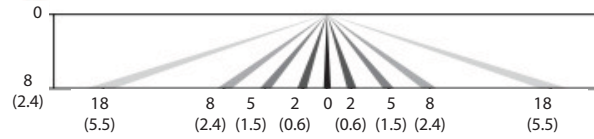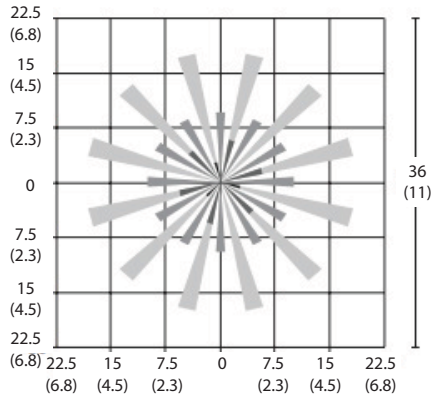

LPM - Lutron wireless radio module and sensor (medium mounting height 20ft)

