



Wattage & Color Temperature  
**SELECTABLE**

# T626LEDB-G2

LARGE LED WALL PACK

## JOB INFORMATION

Type: \_\_\_\_\_  
Catalog No: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Comments: \_\_\_\_\_  
Prepared by: \_\_\_\_\_

T626LEDB-G2

## FEATURES

### USE OF PRODUCT

The intended use of this product is for decorative wall mount, building accents, pedestrian walkways, public access areas, or to accent walkways & landscape. Wattage and color temperature may be modified in field with a simple dial.

### HOUSING

Rugged die cast aluminum housing hinged front frame. 1/2" coin plugs with O-rings for conduit & photocell.

### FINISH

Matt-finished, architectural bronze powdercoat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

### OPTICS

Polycarbonate optical lens with UV stabilizers. Sealed by a one-piece silicon gaskets prohibits entrance of outside contaminants.

### LED

High output LEDs offer a minimum estimated operating life of 50,000 hours, Color temperature selectable at 3000K, 4000K and 5000K with CRI>70.

Color temperature may be modified in the field. LEDs placed on high performance aluminum heatsink for reduced junction temperatures and extended life

### DRIVER

Durable LED driver operates at 120-277V with 0-10V dimming protocol. Power factor: 0.90. Fixture available in selectable wattage at 70W and 100W. Wattage may be modified in the field. Driver protections includes: Output open load, over-current and short-circuit, and over-temperature with auto recovery. -40°C Min Temp. to 40°C Max Temp.

### MOUNTING

Mounted over a 4" recessed outlet box or 1/2" surface conduit.

### LISTINGS/COMPLIANCE

- UL - Listed for wet location
- CEC compliant emergency driver

## WATTAGE/COLOR TEMP. SELECTABLE

Watts	CRI	Lumens (3000K)	Lumens (4000K)	Lumens (5000K)
70W	70	9100lm	9600lm	9200lm
100W	70	12200lm	13200lm	12400lm




## ORDERING INFO

SERIES	WATT/LUMENS	VOLTAGE	COLOR TEMPERATURE	FINISH	GENERATION	OPTIONS
T626LEDB	WS1 - Wattage Selectable 70W, 100W 70 - Set at 70W 100 - Set at 100W	UNV - 120V-277V	CTS - Color Temp. Selectable (3000K - 4000K - 5000K)	BZ - Bronze MTO - Made to order MGTO - Marin grade made to order	G2 - 2nd Generation	PC - Photocell 120-277V (Integral) MS - Motion Sensor (Bi-Level, Integral) EM - Emergency battery (Integral)

# T626LEDB-G2


LARGE LED WALL PACK

## DIMENSIONS

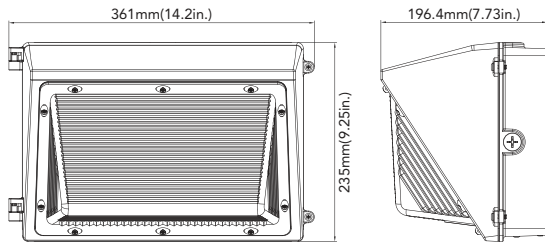

Weight: 5 lbs

## KNOCK-OUT LOCATION



## FEED THROUGH CONDUIT ACCESS

