




# T730LEDB

## SQUARE SLIM LED CANOPY

JOB INFORMATION	TYPE:
	CATALOG NO.
	PROJECT NAME:
	COMMENTS:
	PREPARED BY:

### DIMENSIONS

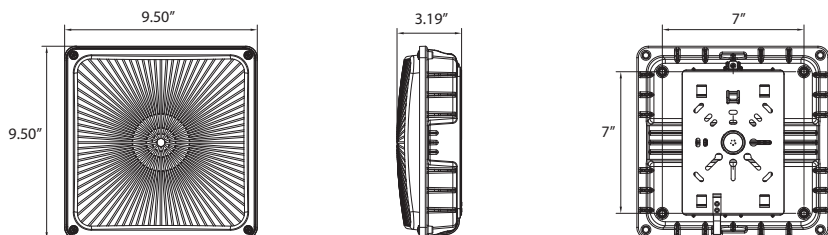

### FEATURES

#### USE OF PRODUCT

The intended use of this product is in parking areas, entrances, walkways, underpasses, loading docks, or recreation areas.

#### HOUSING

Sealed die-cast aluminum housing with knockout located on side.

#### FINISH

Matt-finished, architectural bronze powdercoat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

#### OPTICS

One-piece white powdercoat reflector with polycarbonate lens. Lens is sealed by one-piece silicon gasket prohibits entrance of outside contaminants.

#### LED

High output LEDs offer a minimum estimated operating life of 50,000 hours in 4000K, 5000K with CRI>70; LEDs placed on high performance aluminum heatsink for reduced junction temperatures and extended life.


#### DRIVER

Durable and long lasting LED driver operates at 120-277V with 0-10V dimming driver, -40°C Min Temp. +40°C Max Temp.

#### LISTINGS/COMPLIANCE

- UL - Suitable for wet locations.
- DLC

#### REMOTE EMERGENCY BATTERY

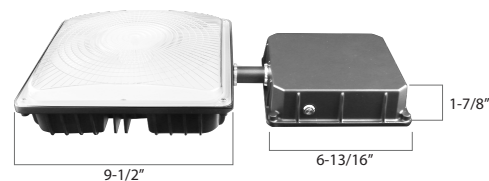

### ORDERING INFO

<b>T730LEDB</b>					
SERIES	WATT/LUMENS	VOLTAGE	COLOR TEMPERATURE	FINISH	OPTIONS
<b>T-SERIES LED</b>	<b>40</b> - 40W/5450 lm <b>60</b> - 60W/8000 lm	<b>UNV</b> -120V-277V <b>347</b> -347-480V	<b>40</b> - 4000K <b>50</b> - 5000K	<b>BZ</b> - Bronze <b>MTO</b> - Made to order <b>MGTO</b> - Marine Grade made to order	<b>MS</b> - Motion sensor (Bi-Level) <b>EM</b> - Emergency battery