



# T731LEDB-WS60

ROUND SLIM LED CANOPY

## JOB INFORMATION

Type: \_\_\_\_\_  
 Catalog No: \_\_\_\_\_  
 Project Name: \_\_\_\_\_  
 Comments: \_\_\_\_\_  
 Prepared by: \_\_\_\_\_

T730LEDB

### USE OF PRODUCT

The intended use of this product is in parking areas, entrances, walkways, underpasses, loading docks, or recreation areas.

### HOUSING

Sealed die-casting profile for indoor and outdoor applications.

### FINISH

Corrosion-resistant, architectural powdercoat. Available in standard white or consult factory for made to order architectural finishes.

### OPTICS

Lumen output from 3600 - 7700 lm with up to 164 lm/W efficiency.

### LED

High-output LEDs feature a field-selectable color temperature (4000K, 5000K) and offer a minimum estimated operating life of 50,000 hours. The LEDs are mounted on a high-performance aluminum heatsink to reduce temperatures and extend overall fixture life.

### DRIVER

Durable and long lasting LED driver operates at 120-277V with 0-10V dimming driver, -40°C Min Temp. +45°C Max Temp.

### LISTINGS/COMPLIANCE

- UL - Suitable for wet locations.
- DLC
- 5 years limited warranty



## ORDERING INFO

SERIES	WATT/LUMENS	COLOR TEMPERATURE	VOLTAGE	MOUNTING
T731LEDB	<b>WS60</b> - Wattage Selectable (60W, 46W, 34W, 22W) <b>S60W</b> - Set at 60W <b>S46W</b> - Set at 46W <b>S34W</b> - Set at 34W <b>S22W</b> - Set at 22W	<b>CTS</b> - Color Temperature Selectable (4000K, 5000K) <b>S40K</b> - Set at 4000K <b>S50K</b> - Set at 5000K	<b>UNV</b> - 120V-277V	<b>SM</b> - Surface Mount <b>PH</b> - Pendant hung

### FINISH

- W<sup>1</sup>** - White
- MTO<sup>2</sup>** - Made to order
- MGTO<sup>2</sup>** - Marine Grade Made to Order

### OPTIONS

- MSR** - Standard PIR Motion Sensor Remote
- ER8W** - Emergency battery 8W Remote
- EI8W** - Emergency battery 8W Integral

### Notes

1. White is standard color
2. RAL number is required

## T731LEDB-WS60 PERFORMANCE CHART


SYSTEM WATTS	4000K (70CRI)		5000K (70CRI)	
	LUMENS	LPW	LUMENS	LPW
60W	7700 lm	128 lm/W	7500 lm	125 lm/W
46W	6500 lm	141 lm/W	6300 lm	137 lm/W
34W	5000 lm	147 lm/W	4900 lm	134 lm/W
22W	3600 lm	164 lm/W	3500 lm	159 lm/W



# T731LEDB-WS60

## DIMENSIONS

Weight: 5.73lbs

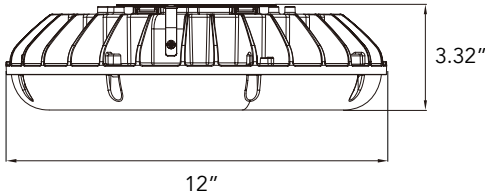


## MOUNTING OPTIONS

SM - Surface Mount with J-Box



PH - Pendant Hung

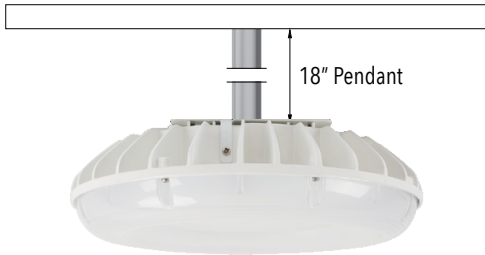

## OPTIONS

ER8W - Remote Emergency Battery 8W



EI8W - Integral Emergency Battery 8W



Optional build-in inside the fixture emergency battery

MSR - Standard PIR Motion Sensor Remote



Optional plug and play PIR motion sensor can be easily installed in field