



T732LEDB-WS80

ROUND SLIM LED CANOPY

JOB INFORMATION

Type: _____
 Catalog No: _____
 Project Name: _____
 Comments: _____
 Prepared by: _____

T730LEDB

USE OF PRODUCT

The intended use of this product is in parking areas, entrances, walkways, underpasses, loading docks, or recreation areas.

HOUSING

Sealed die-casting profile for indoor and outdoor applications.

FINISH

Corrosion-resistant, architectural powdercoat Available in standard white or consult factory for made to order architectural finishes.

OPTICS

Lumen output from 4320 - 1040 lm with up to 140 lm/W efficiency.

LED

High-output LEDs feature a field-selectable color temperature (4000K, 5000K) and offer a minimum estimated operating life of 50,000 hours. The LEDs are mounted on a high-performance aluminum heatsink to reduce temperatures and extend overall fixture life.

DRIVER

Durable and long lasting LED driver operates at 120-277V with 0-10V dimming driver, -40°C Min Temp. +45°C Max Temp.

LISTINGS/COMPLIANCE

- UL - Suitable for wet locations.
- DLC
- 5 years limited warranty



ORDERING INFO

SERIES	WATT/LUMENS	COLOR TEMPERATURE	VOLTAGE	MOUNTING
T732LEDB	WS80 - Wattage Selectable (80W, 64W, 48W, 32W) S80W - Set at 80W S64W - Set at 64W S48W - Set at 48W S32W - Set at 32W	CTS - Color Temperature Selectable (4000K, 5000K) S40K - Set at 4000K S50K - Set at 5000K	UNV - 120V-277V	SM - Surface Mount PH - Pendant hung

FINISH

- W¹** - White
- MTO²** - Made to order
- MGTO²** - Marine Grade Made to Order

OPTIONS

- MSR** - Standard PIR Motion Sensor Remote
- ER8W** - Emergency battery 8W Remote

Notes

1. White is standard color
2. RAL number is required

T7031LEDB-WS80 PERFORMANCE CHART


SYSTEM WATTS	4000K (70CRI)		5000K (70CRI)	
	LUMENS	LPW	LUMENS	LPW
80W	10400 lm	130 lm/W	10000 lm	125 lm/W
64W	8510 lm	133 lm/W	8200 lm	128 lm/W
48W	6580 lm	137 lm/W	6350 lm	132 lm/W
32W	4480 lm	140 lm/W	4320 lm	135 lm/W



T732LEDB-WS80


DIMENSIONS

Weight: 5.73lbs

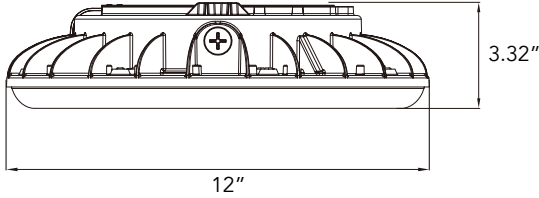


MOUNTING OPTIONS

SM - Surface Mount with J-Box

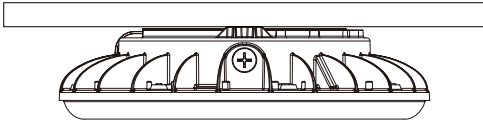

PH - Pendant Hung

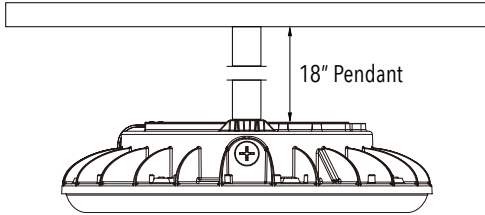

OPTIONS

ER8W - Remote Emergency Battery 8W



MSR - Standard PIR Motion Sensor Remote



Optional plug and play PIR motion sensor can be easily installed in field