



T1070LEDB-WS130

LED LINEAR HIGHBAY

JOB INFORMATION

Type: _____
Catalog No: _____
Project Name: _____
Comments: _____
Prepared by: _____

T1070LEDB

USE OF PRODUCT

The intended use of this product is for interior warehouses, gymnasiums, food service areas, grocery stores, or any commercial or industrial applications.

CONSTRUCTION

Die-cast aluminum

FINISH

White matt-finish, architectural powder coat over a precise chromate conversion coating.

OPTICS

Prismatic translucent lens.

ELECTRICAL

≥0.9 Power Factor
<20% Total Harmonic Distortion
120-277v or 347-480V; 50/60hz
-40°C Min. Temperature; +55°C Max. Temperature
Operating Temperature with Emergency: -5°C
Min. Temperature; +50°C Max.
CRI: 80+

LED

Color temperature selectable LEDs available in 4000K and 5000K
CRI > 70

DRIVER

Universal 120-277V driver with 0-10V dimming.
Driver allows for wattage selectability.

CONTROLS

Optional plug and play PIR sensor or microwave sensor

MOUNTING

Standard cable mount. Optional surface or pendant mount available upon request.

WARRANTY

5 Year limited warranty

LISTING

UL cUL damp location listed
DLC

PERFORMANCE

	4000K	5000K
Watts	Lumens	Lumens
52W	8200lm	8200lm
78W	12100lm	12100lm
104W	15200lm	15200lm
130W	18500lm	18500lm



ORDERING INFO

SERIES	WATTAGE	COLOR TEMPERATURE	VOLTAGE	FINISH	MOUNTING	OPTIONS
T1070LEDB	WS130 - Wattage Selectable (52W, 78W, 104W, 130W)	CTS - Color Temp. Selectable (4000K, 5000K)	UNV - 120V-277V 347 - 347V 480 - 480V	WH ¹ - White	SC - Single Cable SM - Surface Mount PH - Pendant Hung	EM8W - Emergency Backup Battery 8W MS - Motion Sensor RC - Remote Control for Motion Sensor MSB - Motion Sensor + Bluetooth RCB - Remote Control for Bluetooth Motion Sensor WG - Wire Guard
	S52W - Wattage Set at 52W	S40K - Color Temp. Set at 40K				
	S78W - Wattage Set at 78W	S50K - Color Temp. Set at 40K				
	S104W - Wattage Set at 104W					
	S130W - Wattage Set at 130W					

Notes


1. Standard.



T1070LEDB-WS130

LED LINEAR HIGHBAY


DIMENSION

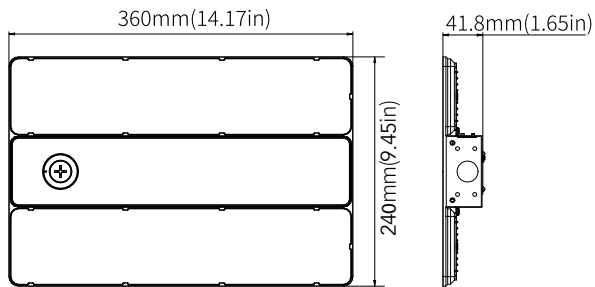

MOUNTING



Single Cable

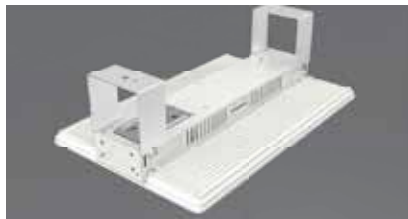

Surface Mount



Pendant