



Wattage & Color Temperature
SELECTABLE

T635LEDB

WALL PACK

JOB INFORMATION

Type: _____
Catalog No: _____
Project Name: _____
Comments: _____
Prepared by: _____

T635LEDB

FEATURES

USE OF PRODUCT

The intended use of this product is for decorative wall mount, building accents, pedestrian walkways, public access areas, or recreation areas.

HOUSING

Rugged die cast aluminum housing with hinged front frame. 1/2" threaded knock-outs are on both sides, top and bottom.

FINISH

Matt-finished, architectural bronze powdercoat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

MOUNTING

Cast-in template for mounting directly over a 3 - 3-1/2" junction box.

LED

High output LEDs offer a minimum estimated operating life of 50,000 hours, Color temperature selectable at 3000K, 4000K and 5000K with CRI>70. Color temperature may be modified in the field. LEDs placed on high performance aluminum heatsink for reduced junction temperatures and extended life.

DRIVER

Durable and long lasting LED driver operates at 120-277V/347V and boasts a 90% power factor at 50 to 60 Hz with 0-10V Dimming Constant Current. Driver protections includes: Output open load, over-current and short-circuit, and over-temperature with auto recovery. -40°C Min Temp. 40°C Max Temp.

LISTINGS/COMPLIANCE

- UL - Listed.
- DLC Listed
- Wet Rated

PERFORMANCE DATA

Wattage	Delivered Lumens	Voltage
28W	4290lm	120-277V/347V
41W	5720lm	120-277V/347V
55W	7150lm	120-277V/347V

130 lm per watt

BUG RATING

Backlight	Uphight	Glare
B1	U2	G2



ORDERING INFO

SERIES	SIZE	WATTAGE	COLOR TEMPERATURE	VOLTAGE
T635LEDB	M - Medium	WS55 - Wattage Selectable (28W, 41W, 55W) S28W - Set at 28W S41W - Set at 41W S55W - Set at 55W	CTS - Color Temperature Selectable (3000K, 4000K, 5000K) S30K - Set at 3000K S40K - Set at 4000K S50K - Set at 5000K	UNV - 120V-277V/347V

FINISH

BZ - Bronze
MTO - Made to order
MGTO - Marine grade made to order

OPTIONS


PC - Photocell 120-277V
MW - Microwave Motion sensor
MSR - Standard PIR remote motion sensor
MFR - FSP311 PIR remote motion sensor
EM8W - 8W Emergency battery
CEM15W - Cold Pack Integral Emergency Battery
TRS - Tamper Resistant Screw




T635LEDB

WALL PACK


DIMENSIONS

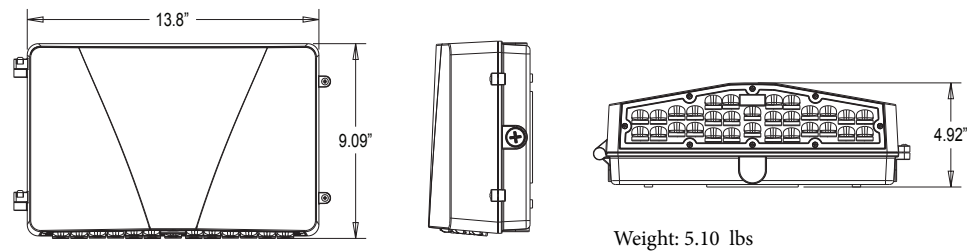

MICROWAVE MOTION SENSOR

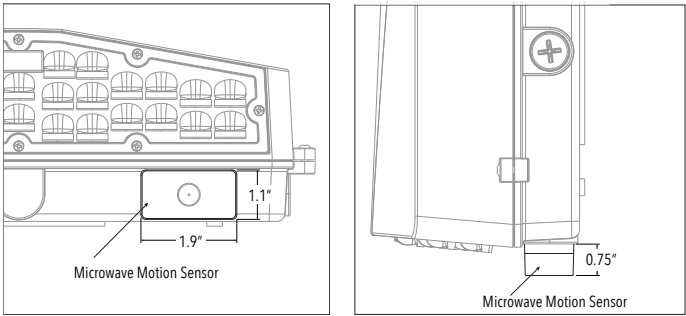

PIR REMOTE MOTION SENSOR

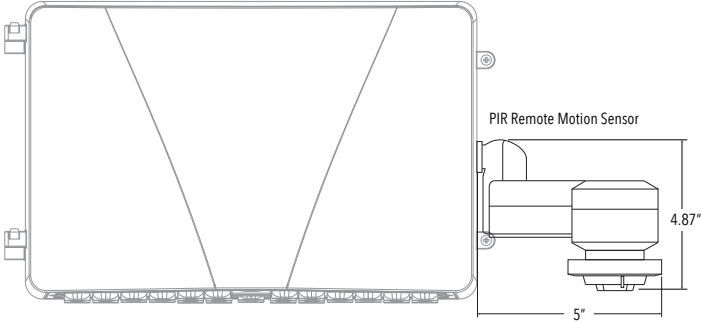

LIGHTING DATA

