



Wattage & Color Temperature  
**SELECTABLE**

# T635LEDB

WALL PACK

## JOB INFORMATION

Type: \_\_\_\_\_  
Catalog No: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Comments: \_\_\_\_\_  
Prepared by: \_\_\_\_\_

T635LEDB

### USE OF PRODUCT

The intended use of this product is for decorative wall mount, building accents, pedestrian walkways, public access areas, or recreation areas.

### HOUSING

Rugged die cast aluminum housing with hinged front frame. 1/2" threaded knock-outs are on both sides, top and bottom.

### FINISH

Matt-finished, architectural bronze powdercoat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

### MOUNTING

Cast-in template for mounting directly over a 3 - 3-1/2" junction box.

### LED

High output LEDs offer a minimum estimated operating life of 50,000 hours, Color temperature selectable at 3000K, 4000K and 5000K with CRI>70. Color temperature may be modified in the field. LEDs placed on high performance aluminum heatsink for reduced junction temperatures and extended life.

### DRIVER

Durable and long lasting LED driver operates at 120-277V/347V and boasts a 90% power factor at 50 to 60 Hz with 0-10V Dimming Constant Current. Driver protections includes: Output open load, over-current and short-circuit, and over-temperature with auto recovery. -40°C Min Temp. 40°C Max Temp.

### LISTINGS/COMPLIANCE

- UL - Listed.
- DLC Listed
- Wet Rated

## PERFORMANCE DATA

| Wattage | Delivered Lumens | Voltage       |
|---------|------------------|---------------|
| 13W     | 1950lm           | 120-277V/347V |
| 19W     | 2600lm           | 120-277V/347V |
| 25W     | 3250lm           | 120-277V/347V |

130 lm per watt

## BUG RATING

| Backlight | Uphight | Glare |
|-----------|---------|-------|
| B1        | U2      | G1    |



## ORDERING INFO

| SERIES   | SIZE      | WATTAGE                                                                                                     | COLOR TEMPERATURE                                                                                           | VOLTAGE             |
|----------|-----------|-------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|---------------------|
| T635LEDB | S - Small | WS25 - Wattage Selectable<br>(13W, 19W, 25W)<br>S13W - Set at 13W<br>S19W - Set at 19W<br>S25W - Set at 25W | CTS - Color Temperature Selectable<br>(3000K, 4000K, 5000K)<br>S30K - 3000K<br>S40K - 4000K<br>S50K - 5000K | UNV - 120-277V/347V |

### FINISH

BZ - Bronze  
MTO - Made to order  
MGTO - Marine grade made to order

### OPTIONS


PC - Photocell 120-277V  
MW - Microwave Motion sensor  
MSR - Standard PIR remote motion sensor  
MFR - FSP311 PIR remote motion sensor  
EM4W - 4W Emergency battery  
CEM15W - Cold Pack Integral Emergency Battery  
TSR - Tamper Resistant Screw




# T635LEDB

WALL PACK


## DIMENSIONS

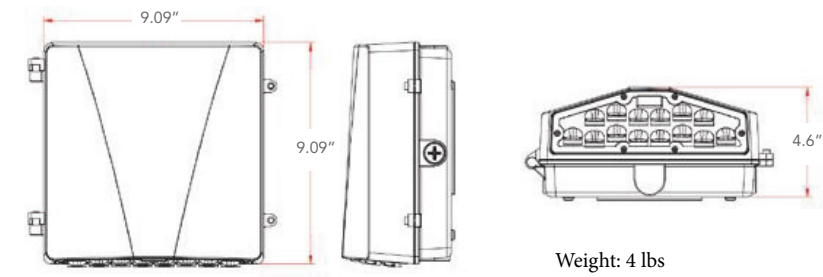

## MICROWAVE MOTION SENSOR

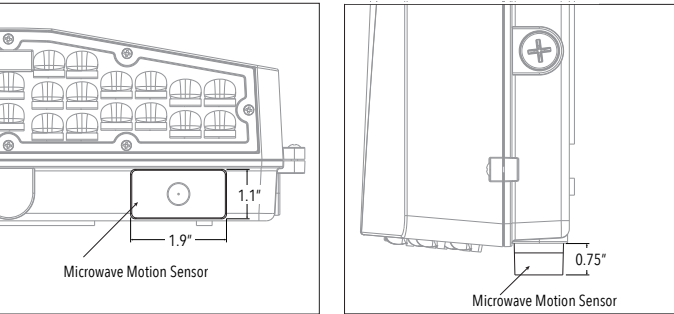

## PIR REMOTE MOTION SENSOR

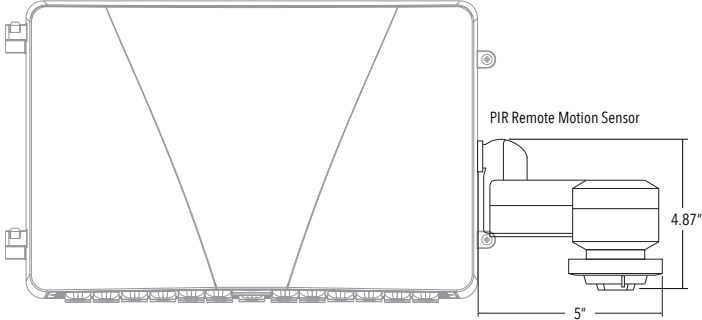

## LIGHTING DATA

