

VERSATRIM CYLINDER SURFACE MOUNT

SAFETY TIPS

IMPORTANT : READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN FOR FUTURE REFERENCE

GENERAL:

Upon receipt of the fixture, thoroughly inspect for any freight damage which should be brought to the attention of the delivery carrier. Compare the catalog description listed on the packing slip with the fixture label on the housing to assure you have received the correct material.

SAFETY:


This fixture must be wired in accordance with the National Electrical Code and applicable local codes and ordinances. Proper grounding is required to insure personal safety. Carefully observe grounding procedure under installation section.

WARNING:


Make certain power is OFF before starting installation or attempting any maintenance. Risk of fire/electric shock. If not qualified, consult an electrician.

- RISK OF ELECTRIC SHOCK—Disconnect power at fuse or circuit breaker before installing or servicing
- RISK OF BURN—Disconnect power and allow fixture to cool before servicing
- RISK OF PERSONAL INJURY—Fixture may become damaged and/or unstable if not installed properly.
- DO NOT mount luminaire within 6" of a combustible surface.
- DO NOT handle luminaire by the glass.
- DO NOT touch LEDs.


FAILURE TO FOLLOW INSTRUCTIONS MAY RESULT IN SERIOUS INJURY OR DEATH

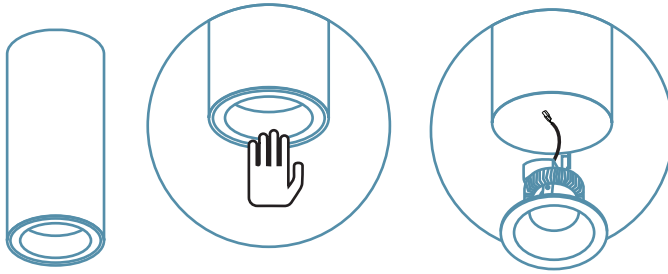

1. Take care to avoid chipping the cylinder by removing the trim/module within the cylinder

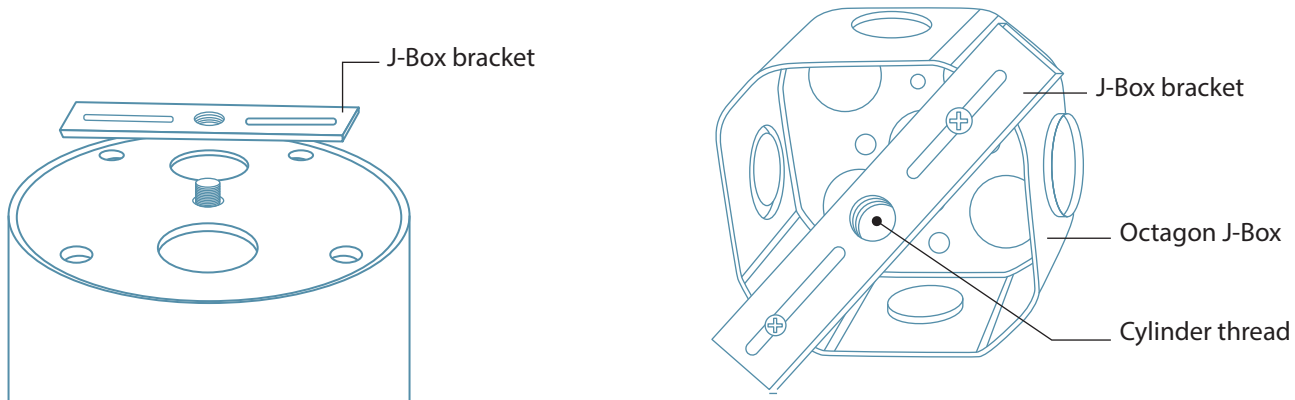

2. As indicated in the diagram, detach the bracket from the upper part of the cylinder and then affix it to the junction box (j-box).

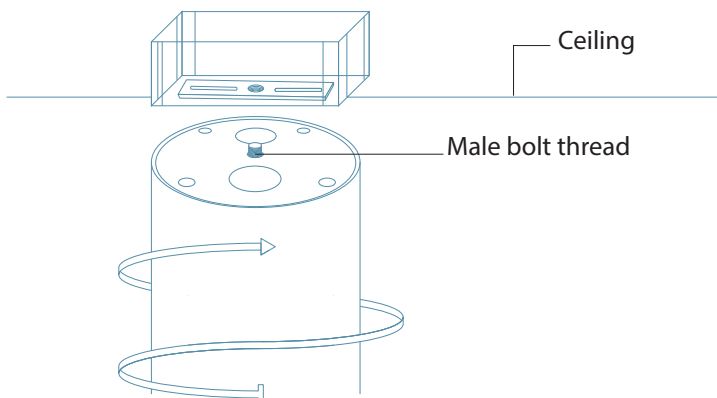

3. Carefully elevate and properly align the threads extending from the bolt cylinder to the J-box bracket. Once the alignment is achieved and the components are properly mounted, proceed to connect the wire leads and reintroduce the module into the cylinder.