



RBS5 (Triac Dimming)

5" BUILDERS PLUS SLIM LED SURFACE LUMINAIRE

JOB INFORMATION

Type: _____
Catalog No: _____
Project Name: _____
Comments: _____
Prepared by: _____

RBS5

FEATURES

USE OF PRODUCT

The 5" Builders Plus Slim LED Surface Luminaire delivers 600 lumen output, making it an versatile choice for residential and light commercial spaces. Designed for a low-profile, clean aesthetic, it is ideal for shallow ceilings, hallways, closets, and multifamily common areas where clear visibility is needed without sacrificing head clearance.

RBS5 FEATURES

- Wattage: 10W
- Color Temperature Selectable: 2700K, 3000K, 3500K, 4000K, 5000K
- CRI: 90+
- Voltage/Dimming: 120V (Triac)

COLOR TEMPERATURE SELECTABLE

Color temperature selectable luminaire allows for easy control between 2700K, 3000K, 3500K, 4000K, and 5000K.

LUMINAIRE CONSTRUCTION

Engineered with a high-grade polymer housing and edge-lit technology to produce a smooth, uniform lighting effect.

INSTALLATION

Fixture may be easily mounted on a standard 3" or 4" octagonal junction box (supplied by others) with a quick snap.

LISTINGS/COMPLIANCE/WARRANTY

- ETL listed
- Energy Star certified
- State of California Title 24 and JA8 compliant
- Wet location rated
- 5-year limited warranty



Wattage	10W
Lumens	600lm
CRI	90
5CTS	27K, 30K, 35K, 40K 50K
Beam Angle	120°
Dimming	Triac

ORDERING INFORMATION

Series	Lumens	Color Temperature	Voltage	Finish
RBS5	6L - 600lm (10W)	5CTS - Color Temperature Selectable (2700K, 3000K, 3500K, 4000K, 5000K)	1 - 120V (Triac)	W - White




DIMENSIONS

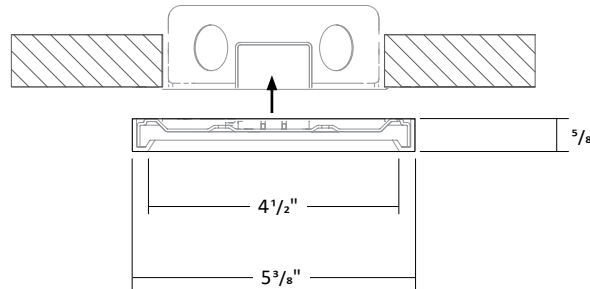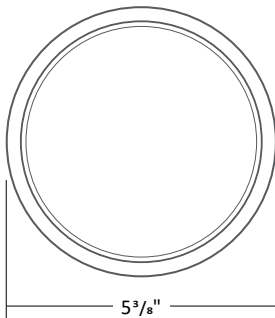

INSTALLATION

Fixture installation



Secure the mounting bracket: Fasten the mounting bracket to the junction box (J-box) using the provided screws.

Install the fixture: Align the downlight with the bracket and press upward until it clicks securely into place.

Included accessories



Mounting
Bracket



J-Box
Screws



Wire
Nuts