



# VERSA COMMERCIAL

## RVC4-AC-DW | 4" LED COMMERCIAL DOWNLIGHT DOUBLE SIDEKICK WALL WASH RETROFIT

### JOB INFORMATION

Type: \_\_\_\_\_  
 Catalog No: \_\_\_\_\_  
 Project Name: \_\_\_\_\_  
 Comments: \_\_\_\_\_  
 Prepared by: \_\_\_\_\_

RVC4-AC-DW

## FEATURES

### USE OF PRODUCT

The 4" Versa Commercial LED Downlight Double Sidekick Wall Wash New Construction is the ideal product for energy efficient lighting in Non-IC New Construction commercial applications. Available with interchangeable reflectors and trims, with an assortment of color temperatures, lenses, filters and dimmable driver options.

### VERSA

- Color Temperature: 2700K, 3000K, 3500K, or 4000K
- SDCM: 2 step binning
- Color Rendering Index: 93+ CRI
- R9: 60+
- Filters: Solite, frosted, or honeycomb
- LED Life: 50,000 Hours
- LED Type: Cree LED
- Driver Info: 120/277V, 50/60 Hz, PF>0.9, THD<0.20
- Versatility: Interchangeable reflector/trim, optics & filters

### LED ENGINE

LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management.

### FRAME CONSTRUCTION

Constructed from 16 gauge heavy duty powder coated cold rolled steel frame with a large access junction box.

### OPTICS (Field Replaceable)

Field replaceable optical lens available in 24°, 36°, and 50°. Easily achieve narrow spot to wide flood beam pattern.

### FILTER ACCESSORIES

A multitude of filter accessories are available to achieve a particular light effect. Available in frosted, honeycomb or solite filter (1 filter only).

### DIMMING

Intelligent Drive all-inclusive ELV (120V), Triac (120V), and 0-10V (120/277V) dimming driver.

### EMERGENCY BATTERY

Optional emergency battery available for a minimum of 90 minutes with both integral or remote test switch available in 8W or 15W.

### INSTALLATION

Non-IC housing. Insulation must be kept at least 3" away from fixture.

### LABELS/COMPLIANCE/WARRANTY

- CSA Listed for US and Canada (Wet Location).
- 5 year limited warranty.



## ORDERING INFORMATION

Series	Wattage	Dimming	Color Temperature	Filter	Housing Type
RVC4DW-24	6W - 6 Watt	<b>ID</b> - Standard All-Inclusive ELV(120V), Triac(120V), and 0-10V(120-277V) Dimming Driver (Intelligent Drive) <b>LDE1</b> - Lutron Hi-Lume 1% Ecosystem with Soft-on, Fade-to-Black Dimming <b>L3DA</b> - Hi-lume 1% EcoSystem/3-Wire L3D Driver <b>EEL</b> - eldoLED Eco 1% Dim (0-10V) <b>EDIO</b> - eldoLED Solo 0.1% Dim (0-10V) <b>EDID</b> - eldoLED Solo 0.1% Dim (DALI)	<b>27K</b> - 2700K	<b>None</b> - Included	<b>AC</b> - Retrofit
RVC4DW-36	9W - 9 Watt		<b>30K</b> - 3000K	<b>F</b> - Frosted	
RVC4DW-50	12W - 12 Watt		<b>35K</b> - 3500K	<b>H</b> - Honey Comb	
	15W - 15 Watt		<b>40K</b> - 4000K	<b>S</b> - Solite	
	20W - 20 Watt				
	24W - 24 Watt				
	28W - 28 Watt				
	32W - 32 Watt				
	33W - 33 Watt				
	35W - 35 Watt				
	40W - 40 Watt				
	48W - 48 Watt				
	56W - 56 Watt				

Double Wall Wash Trim	Options	Notes
<b>4TWD</b> - White <b>4TSD</b> - Specular Clear <b>4THD</b> - Haze <b>4TBD</b> - Black <b>MTO</b> - Made To Order	<b>ER8W</b> - 8W Emergency Battery with Remote Switch (800 lm) <b>ER15W</b> - 15W Emergency Battery with Remote Switch (1500 lm) <b>SDT</b> - 347V Step Down Transformer <b>WL</b> - Wet Location <b>LAW</b> <sup>2</sup> - Lutron Athena Wireless Node	1. Consult factory.



# RVC4-AC-DW

## VERSA COMMERCIAL 4" LED DOWNLIGHT DOUBLE SIDEKICK WALL WASH RETROFIT

### PERFORMANCE CHART

	Optics	24°	36°	50°
6W	Initial Lumens	955	955	955
	Delivered Lumens	754	762	705
9W	Initial Lumens	1296	1296	1296
	Delivered Lumens	1028	1038	960
12W	Initial Lumens	1618	1618	1618
	Delivered Lumens	1289	1303	960
15W	Initial Lumens	2015	2015	2015
	Delivered Lumens	1575	1592	1470
20W	Initial Lumens	2422	2422	2422
	Delivered Lumens	1922	1943	1795
24W	Initial Lumens	2799	2799	2799
	Delivered Lumens	2262	2288	2113
28W	Initial Lumens	3128	3128	3128
	Delivered Lumens	2524	2561	2352
32W	Initial Lumens	3405	3405	3405
	Delivered Lumens	2924	2959	2738
33W	Initial Lumens	4090	4090	4090
	Delivered Lumens	3295	3399	3056
35W	Initial Lumens	4626	4626	4626
	Delivered Lumens	3655	3771	3401
40W	Initial Lumens	4967	4967	4967
	Delivered Lumens	3999	4127	3730
48W	Initial Lumens	5765	5765	5765
	Delivered Lumens	4660	4810	4351
56W	Initial Lumens	6472	6472	6472
	Delivered Lumens	5258	5425	4912

\* Values are listed at 3000K, 90+ CRI with a white bevel & trim.


### COLOR TEMPERATURE MULTIPLIER FOR DELIVERED LUMENS

2700K	3000K	3500K	4000K
0.95	1.00	1.04	1.07


# RVC4-AC-DW

VERSA COMMERCIAL 4" LED DOWNLIGHT DOUBLE SIDEKICK WALL WASH RETROFIT


## RVC4-AC-DW ANATOMY

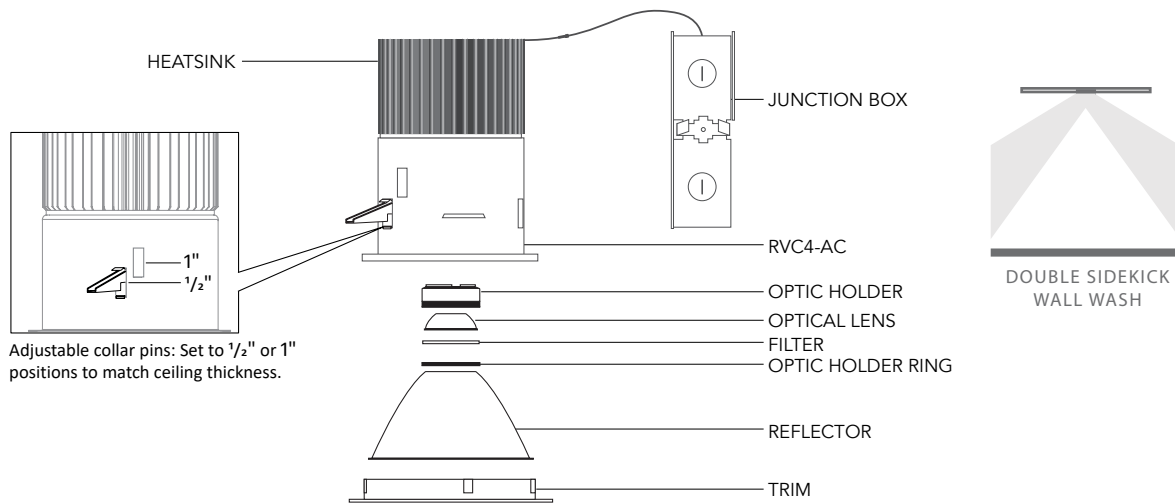

## RVC4-AC-DW DIMENSIONS 6W-20W

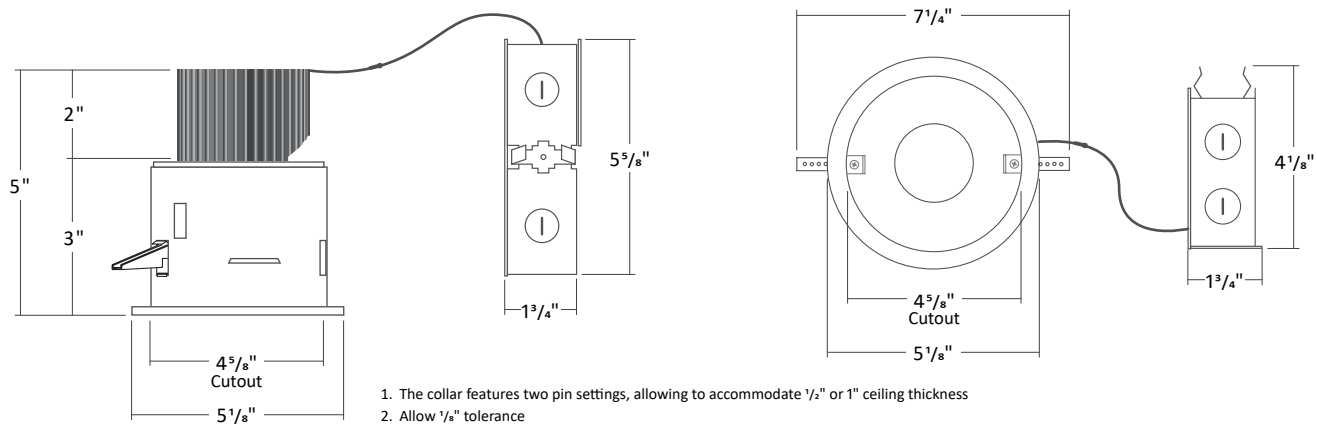

## RVC4-AC-DW DIMENSIONS 24W-56W

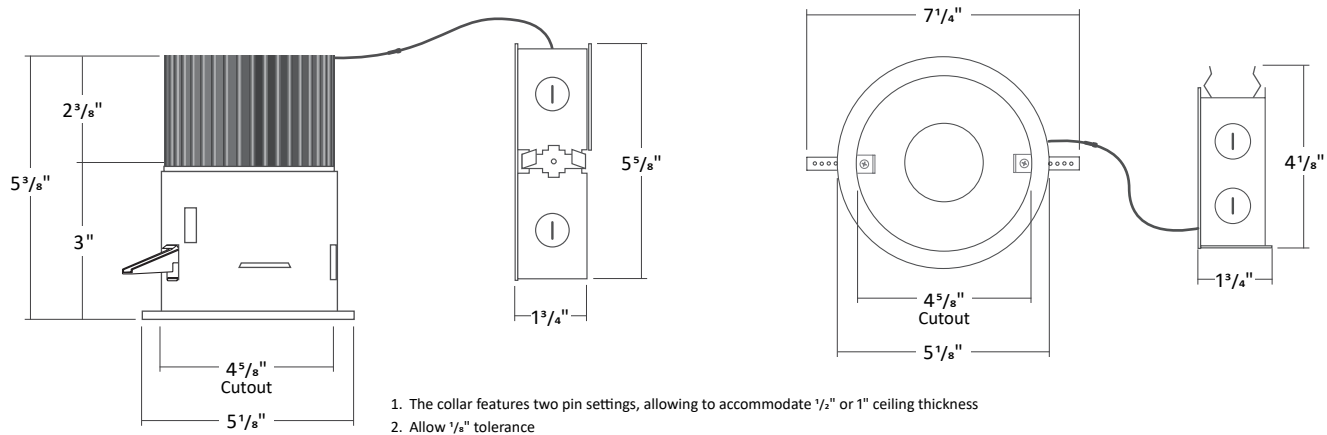


# RVC4-AC-DW

VERSA COMMERCIAL 4" LED DOWNLIGHT DOUBLE SIDEKICK WALL WASH RETROFIT


## FILTERS



Frosted Filter





Honey Comb



Solite Filter

## REFLECTOR / TRIM DIMENSIONS

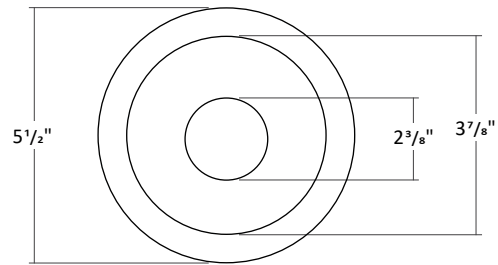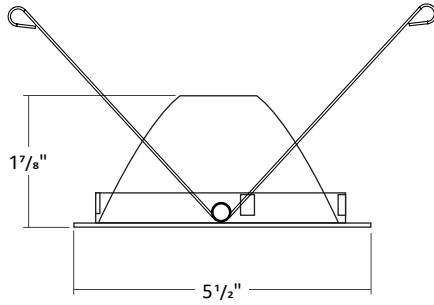

## TRIM FINISH



White



Specular Clear



Haze



Black

\*Consult Factory for Made to Order Finishes