



T1085LEDB-WS150

LED HIGHBAY WITH COLOR TEMPERATURE SELECTABLE

JOB INFORMATION

Type: _____
Catalog No: _____
Project Name: _____
Comments: _____
Prepared by: _____

T1085LED-G2

USE OF PRODUCT

The intended use of this product is for interior warehouses, gymnasiums, food service areas, grocery stores, or any commercial or industrial applications.

CONSTRUCTION

Die-cast aluminum fixture with sealed lens for wet location applications.

FINISH

Black matt-finish, architectural powder coat over a precise chromate conversion coating. Consult factory for made to order architectural finishes.

OPTICS

Available in clear prismatic acrylic or polished aluminum reflector. Optional conical drop lens or smooth flat lens available upon request.

ELECTRICAL

≥0.9 Power Factor
<20% Total Harmonic Distortion
120-277v, Optional 347/480V; 50/60hz
-40°C Min. Temperature
+55°C Max. Temperature
CRI: 72

LED

Available in 4000K and 5000K with CRI > 70. Optional photocell or motion sensor (consult factory for setting capabilities) available upon request for further energy savings and security measures.

MOUNTING

Standard installation includes hook mount and optional surface mount with U-bracket. May be stem mounted if remove hook (pendant may be provided by Rayon Lighting or others).

DRIVER

Universal 120-277V driver with 0-10V dimming. Driver allows for lumen selectability.

WARRANTY

5-year limited warranty.

LISTING

UL-wet location.

T1085LEDB-WS150		4000K	5000K
Wattage Percentage	Watts	Lumens	Lumens
100%	150W	24000	22500
80%	120W	20000	19000
60%	90W	15500	14600
40%	60W	10800	10000

ORDERING INFORMATION

Series	Wattage	Color Temperature	Voltage
T1085LEDB	WS150 - Wattage Selectable (60W, 90W, 120W, 150W) S60W - Wattage Set at 60W S90W - Wattage Set at 90W S120W - Wattage Set at 120W S150W - Wattage Set at 150W	CTS - Color Temperature Selectable (4000K, 5000K) S40K - Color Temperature Set at 4000K S50K - Color Temperature Set at 5000K	UNV - 120V-277V
Finish	Mounting	Reflector	Options
B - Black MTO - Made To Order	H - Hook SM - Stem Mount USB - U Bracket Surface Mount	Blank - None AL - Aluminum Reflector PL - Prismatic Reflector	EM16W - Emergency Battery (Remote Mount) MS - Motion Sensor PCL¹ - Conical Dropdown Lens (for Prismatic Reflector)


Notes

1. Conical dropdown lens is compatible with prismatic reflector only

T1085LEDB-WS150

LED HIGHBAY WITH COLOR TEMPERATURE SELECTABLE

DIMENSIONS

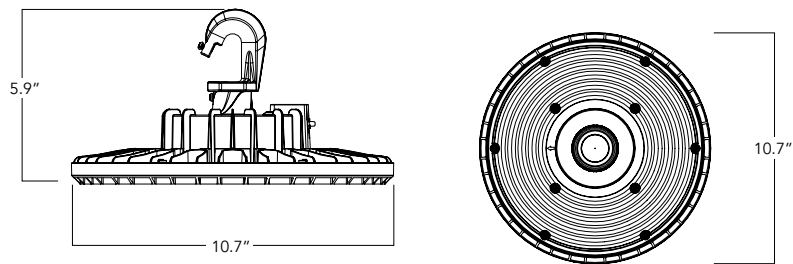

MOUNTING



Hook Mount



Stem Mount



U-Bracket Mount

REFLECTORS



Aluminum Reflector



Prismatic Reflector



Conical Dropdown Lens