



Wattage & Color Temperature  
**SELECTABLE**

## T614LEDB-E

MEDIUM LED ROUND WALL PACK & CEILING CANOPY

### JOB INFORMATION

Type: \_\_\_\_\_  
Catalog No: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Comments: \_\_\_\_\_  
Prepared by: \_\_\_\_\_

T633LEDB

### USE OF PRODUCT

Engineered for wall and ceiling applications, this fixture provides flexible solution for any outdoor commercial or industrial environment. Suitable for building accents, pedestrian walkways, public access areas, or recreation spaces.

### HOUSING

Rugged die cast aluminum housing with hinged frame. 0.87" Coin plugs for conduit.

### LENS

Constructed of durable polycarbonate for excellent impact resistance and long-term performance in outdoor environments. Provides consistent light transmission while protecting the internal components from environmental exposure.

### LED

LED engine available in 3000K, 4000K, 5000K in 80 CRI. Color temperature may be modified in field.

### DRIVER

Durable and long lasting LED driver operates at 120-277V and boasts a 90% power factor at 50/60 Hz with 0-10V Dimming Constant Current. Fixture is Wattage selectable (10W, 20W, 30W, 40W). Wattage may be modified in field.

### MOUNTING

Cast-in template for mounting directly over a 4" recessed junction box.

### FINISH

Matt-finished, architectural bronze powder coat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

### LISTINGS/COMPLIANCE

- UL - Listed for wet location.
- DLC qualified.
- CEC compliant emergency driver.
- IP65.
- 5 years limited warranty.

### PERFORMANCE CHART

Wattage      Delivered Lumens

|     |         |
|-----|---------|
| 10W | 600 lm  |
| 20W | 1220 lm |
| 30W | 1800 lm |
| 40W | 2400 lm |

\*Detailed performance chart may be found on page 2



### ORDERING INFORMATION

| SERIES     | WATT/LUMENS                                                                                                                                                                                              | VOLTAGE               | COLOR TEMPERATURE                                                                                                                                                                                | FINISH                                                                                       |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| T614LEDB-E | <b>WS40</b> - Wattage Selectable<br>(10W, 20W, 30W, 40W)<br><b>S10W</b> - Wattage set at 10W<br><b>S20W</b> - Wattage set at 20W<br><b>S30W</b> - Wattage set at 30W<br><b>S40W</b> - Wattage set at 40W | <b>UNV</b> - 120-277V | <b>CTS</b> - Color Temperature Selectable<br>(3000K, 4000K, 5000K)<br><b>S30K</b> - Color Temp. set at 3000K<br><b>S40K</b> - Color Temp. set at 4000K<br><b>S50K</b> - Color Temp. set at 5000K | <b>BZ</b> - Bronze<br><b>MTO</b> - Made to Order<br><b>MGTO</b> - Marine Grade Made to Order |



### INCLUDED

PC - Photocell 120-127V

### OPTIONS

**MW** - Microwave Motion Sensor  
**EM8W** - 8W Emergency Battery  
**EM20W** - 20W Emergency Battery  
**CEM15W** - Cold Pack Integral Emergency Battery

### APPLICATIONS




# T614LEDB-E

MEDIUM LED ROUND WALL PACK & CEILING CANOPY

## DETAILED PEFRORMANCE CHART

| WATTAGE | DELIVERED LUMENS | LUMENS/WATT | VOLTAGE  | CRI |
|---------|------------------|-------------|----------|-----|
| 10W     | 600 lm           | 60 lm/w     | 120-277V | 80+ |
| 20W     | 1220 lm          | 61 lm/w     | 120-277V | 80+ |
| 30W     | 1800 lm          | 60 lm/w     | 120-277V | 80+ |
| 40W     | 2400 lm          | 60 lm/w     | 120-277V | 80+ |

## DIMENSIONS

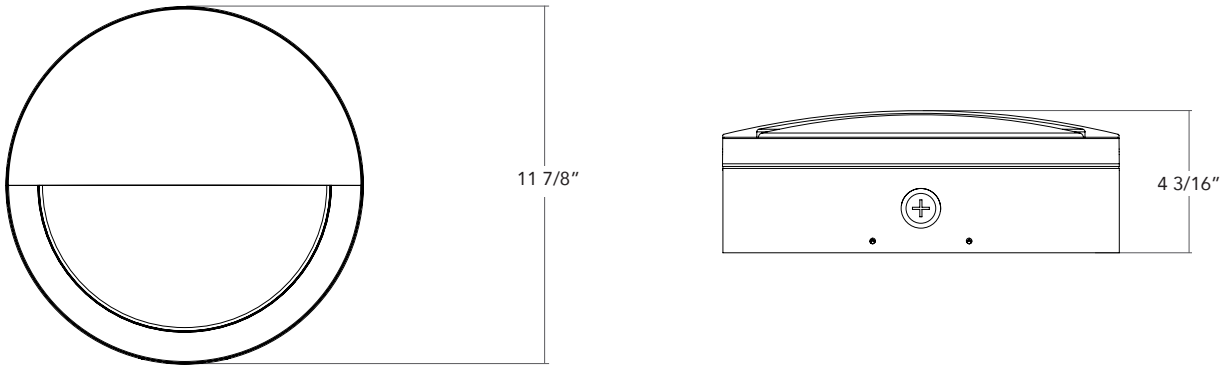

## OPTIONS & SETTINGS

