



Wattage & Color Temperature
SELECTABLE

T614LEDB-G

MEDIUM LED ROUND WALL PACK & CEILING CANOPY

JOB INFORMATION

Type: _____
Catalog No: _____
Project Name: _____
Comments: _____
Prepared by: _____

T633LEDB

USE OF PRODUCT

Engineered for wall and ceiling applications, this fixture provides flexible solution for any outdoor commercial or industrial environment. Suitable for building accents, pedestrian walkways, public access areas, or recreation spaces.

HOUSING

Rugged die cast aluminum housing with hinged frame. 0.87" Coin plugs for conduit.

LENS

Constructed of durable polycarbonate for excellent impact resistance and long-term performance in outdoor environments. Provides consistent light transmission while protecting the internal components from environmental exposure.

LED

LED engine available in 3000K, 4000K, 5000K in 80 CRI. Color temperature may be modified in field.

DRIVER

Durable and long lasting LED driver operates at 120-277V and boasts a 90% power factor at 50/60 Hz with 0-10V Dimming Constant Current. Fixture is Wattage selectable (10W, 20W, 30W, 40W). Wattage may be modified in field.

MOUNTING

Cast-in template for mounting directly over a 4" recessed junction box.

FINISH

Matt-finished, architectural bronze powder coat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

LISTINGS/COMPLIANCE

- UL - Listed for wet location.
- DLC qualified.
- CEC compliant emergency driver.
- IP65.
- 5 years limited warranty.

PERFORMANCE CHART

Wattage Delivered Lumens

10W	910 lm
20W	1880 lm
30W	2760 lm
40W	3640 lm

*Detailed performance chart may be found on page 2



ORDERING INFORMATION

SERIES	WATT/LUMENS	VOLTAGE	COLOR TEMPERATURE	FINISH
T614LEDB-G	WS40 - Wattage Selectable (10W, 20W, 30W, 40W) S10W - Wattage set at 10W S20W - Wattage set at 20W S30W - Wattage set at 30W S40W - Wattage set at 40W	UNV - 120-277V	CTS - Color Temperature Selectable (3000K, 4000K, 5000K) S30K - Color Temp. set at 3000K S40K - Color Temp. set at 4000K S50K - Color Temp. set at 5000K	BZ - Bronze MTO - Made to Order MGTO - Marine Grade Made to Order



INCLUDED

PC - Photocell 120-127V

OPTIONS

MW - Microwave Motion Sensor
EM8W - 8W Emergency Battery
EM20W - 20W Emergency Battery
CEM15W - Cold Pack Integral Emergency Battery

APPLICATIONS




T614LEDB-G

MEDIUM LED ROUND WALL PACK & CEILING CANOPY

DETAILED PERFORMANCE CHART

WATTAGE	DELIVERED LUMENS	LUMENS/WATT	VOLTAGE	CRI
10W	910 lm	91 lm/w	120-277V	80+
20W	1880 lm	94 lm/w	120-277V	80+
30W	2760 lm	92 lm/w	120-277V	80+
40W	3640 lm	91 lm/w	120-277V	80+

DIMENSIONS

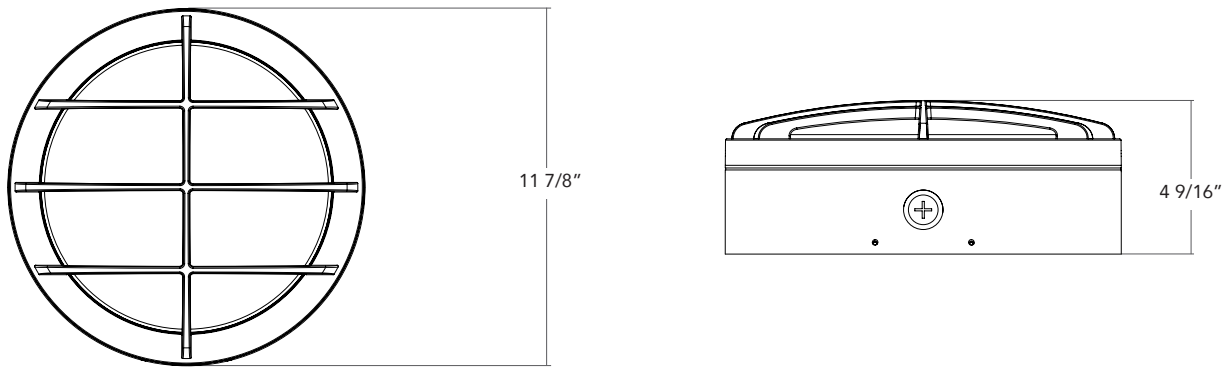

OPTIONS & SETTINGS

