Wattage & Color Temperature
SELECTABLE

T624LEDB

LED SLIM WALL PACK

JOB INFORMATION

Type: _____

Catalog No: _____

Project Name: _____

Comments: _____

Prepared by: _____

T633LEDB

FEATURES

USE OF PRODUCT
The intended use of this product is for any outdoor commercial or industrial building accent, pedestrian walkways, public access areas, or recreation areas.

HOUSING
Rugged die cast aluminum housing with hinged frame. 1/2" Coin plugs with O-rings for conduit & photocell.

FINISH
Matt-finished, architectural bronze powdercoat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

OPTICS
Tempered UV coated flat lens provide outstanding performance, uniformity, and glare control.

LED
LED engine available in 3500K, 4000K, 5000K. Color temperature may be modified in field or preset by factory. LED Mounted to aluminum heat sink for maximum life output and thermal management.

DRIVER
Durable and long lasting LED driver operates at 120-277V and boasts a 90% power factor at 50 to 60 Hz with 0-10V Dimming Constant Current. Fixture available in two packages. LS1 (1300, 2600, 3900, 5200lm) & LS3 (3900, 7800, 11700, 15600lm). Watts may be modified in field or preset by factory available upon request -40°C Min Temp. 50°C Max Temp.

MOUNTING
Cast-in template for mounting directly over a 4" recessed outlet box or 1/2" surface conduit.

LISTINGS/COMPLIANCE
- DLC.
- UL - Listed for wet location.

PERFORMANCE DATA

Wattage	Delivered Lumens	Voltage	CRI
10W	1300lm	120-277V	70
20W	2600lm	120-277V	70
30W	3900lm	120-277V	70
40W	5200lm	120-277V	70

130 lm per watt

Wattage	Delivered Lumens	Voltage	CRI
30W	3900lm	120-277V	70
60W	7800lm	120-277V	70
90W	11700lm	120-277V	70
120W	15600lm	120-277V	70

130 lm per watt

ORDERING INFO

SERIES	WATT/LUMENS	COLOR TEMPERATURE	VOLTAGE	FINISH	OPTIONS
T624LEDB	**WS40** - Wattage Selectable (10W, 20W, 30W, 40W) **S10W** - Lumens set at 10W **S20W** - Lumens set at 20W **S30W** - Lumens set at 30W **S40W** - Lumens set at 40W **WS120** - Wattage Selectable (30W, 60W, 90W, 120W) **S30W** - Lumens set at 30W **S60W** - Lumens set at 60W **S90W** - Lumens set at 90W **S120W** - Lumens set at 120W	**CTS** - Color Temperature Selectable (3000K, 4000K, 5000K) **S30K** - Color Temp. set at 3000K **S40K** - Color Temp. set at 4000K **S50K** - Color Temp. set at 5000K	**UNV** - 120V-277V	**BZ** - Bronze **MTO** - Made to order **MGTO** - Marine grade made to order	**PC** - Photocell 120-277V **EM8W** - Emergency battery (WS40) **EM20W** - Emergency battery (WS120) **MW** - Microwave Motion sensor **MSI** - Standard PIR (Integral)motion sensor **MFI** - FSP311 PIR (Integral)motion sensor **SP10** - Surge protector **CEM15W** - Cold Pack Integral Emergency Battery

T624LEDB

LED SLIM WALL PACK
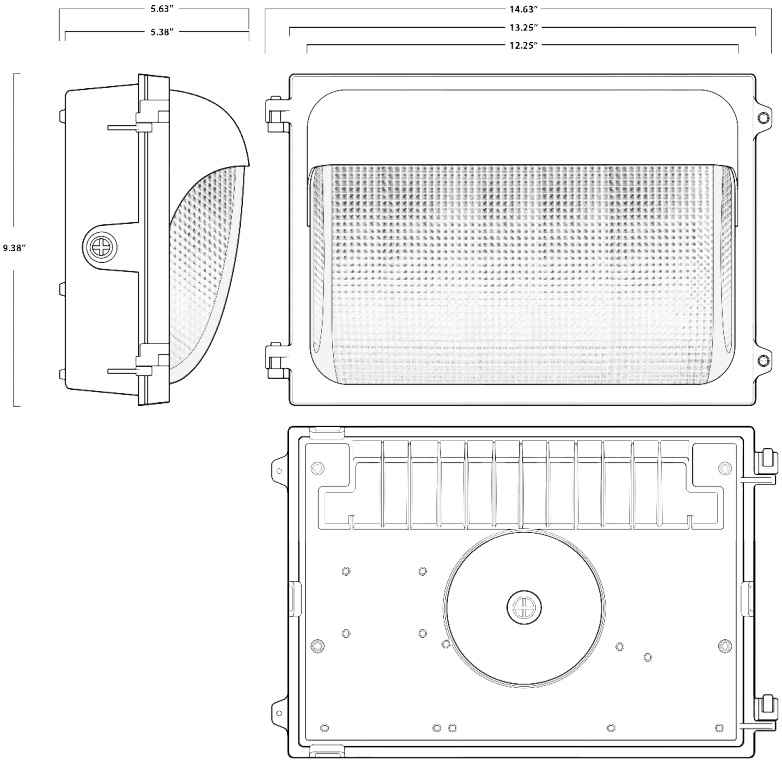
DIMENSIONS