



T626LEDB-G2

LARGE LED WALL PACK

JOB INFORMATION

Type: _____
 Catalog No: _____
 Project Name: _____
 Comments: _____
 Prepared by: _____

T626LEDB-G2

FEATURES

USE OF PRODUCT

The intended use of this product is for decorative wall mount, building accents, pedestrian walkways, public access areas, or to accent walkways & landscape. Wattage and color temperature may be modified in field with a simple dial.

HOUSING

Rugged die cast aluminum housing hinged front frame. 1/2" coin plugs with O-rings for conduit & photocell.

FINISH

Matt-finished, architectural bronze powdercoat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

OPTICS

Polycarbonate optical lens with UV stabilizers. Sealed by a one-piece silicon gaskets prohibits entrance of outside contaminants.

LED

High output LEDs offer a minimum estimated operating life of 50,000 hours, Color temperature selectable at 3000K, 4000K and 5000K with CRI>70.

Color temperature may be modified in the field. LEDs placed on high performance aluminum heatsink for reduced junction temperatures and extended life

DRIVER

Durable LED driver operates at 120-277V with 0-10V dimming protocol. Power factor: 0.90. Fixture available in selectable wattage at 70W and 100W. Wattage may be modified in the field. Driver protections includes: Output open load, over-current and short-circuit, and over-temperature with auto recovery. -40°C Min Temp. to 40°C Max Temp.

MOUNTING

Mounted over a 4" recessed outlet box or 1/2" surface conduit.

LISTINGS/COMPLIANCE

- UL - Listed for wet location
- CEC compliant emergency driver

WATTAGE/COLOR TEMP. SELECTABLE

Watts	CRI	Lumens (3000K)	Lumens (4000K)	Lumens (5000K)
70W	70	9100lm	9600lm	9200lm
100W	70	12200lm	13200lm	12400lm



ORDERING INFO


SERIES	WATT/LUMENS	COLOR TEMPERATURE	VOLTAGE
T626LEDB	WS100 - Wattage Selectable 70W, 100W S70W - Set at 70W S100W - Set at 100W	CTS - Color Temp. Selectable (3000K - 4000K - 5000K) S30K - Set at 3000K S40K - Set at 4000K S50K - Set at 5000K	UNV - 120V-277V
FINISH	GENERATION	OPTIONS	
BZ - Bronze MTO - Made to order MGTO - Marine grade made to order	G2 - 2nd Generation	PC - Photocell 120-277V (Integral) EM20W - Emergency Battery 20W MSI - Standard PIR (Integral)motion sensor MFI - FSP311 PIR (Integral)motion sensor CEM15W - Cold Pack Integral Emergency Battery	



T626LEDB-G2


LARGE LED WALL PACK

DIMENSIONS

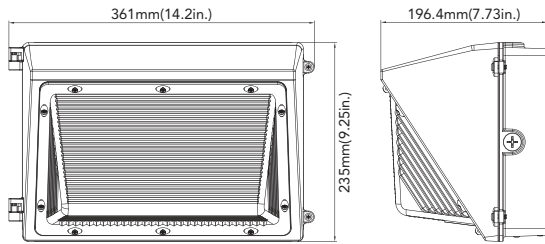

Weight: 5 lbs

KNOCK-OUT LOCATION



FEED THROUGH CONDUIT ACCESS

