



T629LEDB

MEDIUM LED WALL PACK

JOB INFORMATION

Type: _____
Catalog No: _____
Project Name: _____
Comments: _____
Prepared by: _____

T629LEDB

USE OF PRODUCT

The intended use of this product is for any outdoor commercial or industrial building accent decorative wall mount or public access area, recreation areas, stairwell & corridor applications.

HOUSING

Rugged die cast aluminum housing hinged front frame. 1/2" coin plugs with O-rings for conduit & photocell.

FINISH

Matt-finished, architectural bronze powdercoat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

OPTICS

Specular anodized aluminum reflector with polycarbonate lens for shock resistance. Sealed by a one-piece silicon gaskets prohibits entrance of outside contaminants.

LED

High output LEDs offer a minimum estimated operating life of 50,000 hours in 4000K (standard), or 5000K with CRI>83. LEDs placed on high performance aluminum heatsink for reduced junction temperatures and extended life.

DRIVER

Durable and long lasting LED driver operates at 120-277V and boasts a 90% power factor at 50 to 60 Hz with 0-10V Dimming Constant Current. Driver protections includes: Output open load, over-current and short-circuit, and over-temperature with auto recovery. -40°C Min Temp. 40°C Max Temp. step down transformer may be utilized for 480V or 347V applications.

MOUNTING

Mounted over a 4" recessed outlet box or 1/2" surface conduit.

LISTINGS/COMPLIANCE

- UL - Listed for wet location.
- CEC compliant emergency driver
- DLC qualified.



ORDERING INFO

SERIES	WATT/LUMENS	COLOR TEMPERATURE	VOLTAGE	FINISH	OPTIONS
T629LEDB	WS40 - Wattage selectable (10W, 20W, 30W, 40W)	CTS - Color Temp. Selectable (3000K, 4000K, 5000K)	UNV - 120V-277V	BZ ¹ - Bronze	PC - Photocell 120-277V
	S10W - Set at 10W	S30K - Set at 3000K		MTO ² - Made to order	MW - Microwave Motion Sensor
	S20W - Set at 20W	S40K - Set at 4000K		MGTO ² - Marine grade made to order	EM8W - Emergency battery (Integral) WS40
	S30W - Set at 30W	S50K - Set at 5000K			EM20W - Emergency battery (Integral) WS120
	S40W - Set at 40W				CEM15W - Cold Pack Integral Emergency Battery
					SDT - Step down transformer
					TRS - Tamper Resistant Screw
	WS120 - Wattage selectable (30W, 60W, 90W, 120W)				
	S30W - Set at 30W				
	S60W - Set at 60W				
	S90W - Set at 90W				
	S120W - Set at 120W				


Notes

1. Standard
2. RAL number required.


T629LEDB

MEDIUM LED WALL PACK


DIMENSIONS

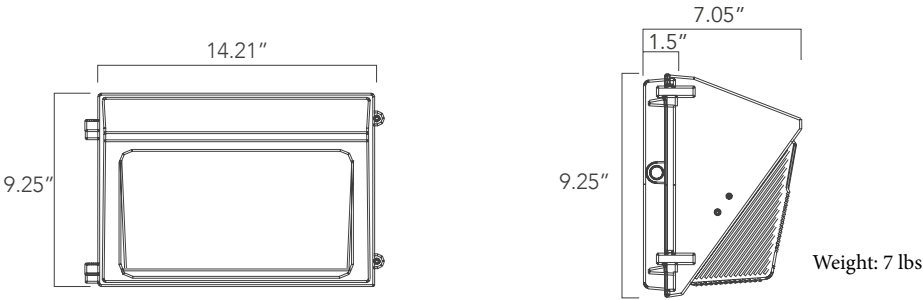

T629LED KNOCK-OUT LOCATION



FEED THROUGH CONDUIT ACCESS

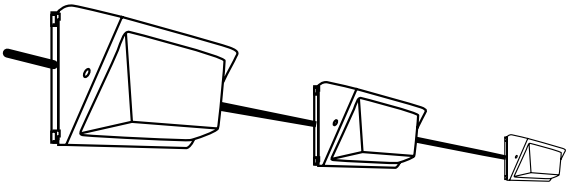

MOUNTING POINTS

