

T629LED

MEDIUM LED WALL PACK

JOB INFORMATION

Type: _____

Catalog No: _____

Project Name: _____

Comments: _____

_____

Prepared by: _____

T629LED

USE OF PRODUCT

The intended use of this product is for any outdoor commercial or industrial building accent decorative wall mount or public access area, recreation areas, stairwell & corridor applications.

HOUSING

Rugged die cast aluminum housing hinged front frame. 1/2" coin plugs with O-rings for conduit & photocell.

FINISH

Matt-finished, architectural bronze powdercoat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

OPTICS

Specular anodized aluminum reflector with polycarbonate lens for shock resistance. Sealed by a one-piece silicon gaskets prohibits entrance of outside contaminants.

LED

High output LEDs offer a minimum estimated operating life of 50,000 hours in 4000K (standard) , or 5000K with CRI>83. LEDs placed on high performance aluminum heatsink for reduced junction temperatures and extended life.

DRIVER

Durable and long lasting LED driver operates at 120-277V and boasts a 90% power factor at 50 to 60 Hz with 0-10V Dimming Constant Current. Driver protections includes: Output open load, over-current and short-circuit, and over-temperature with auto recovery. -40°C Min Temp. 40°C Max Temp. step down transformer may be utilized for 480V or 347V applications.

MOUNTING

Mounted over a 4" recessed outlet box or 1/2" surface conduit.

LISTINGS/COMPLIANCE

- UL - Listed for wet location.
- CEC compliant emergency driver
- DLC qualified.

ORDERING INFO

SERIES	WATT/LUMENS	COLOR TEMPERATURE	VOLTAGE	FINISH	GENERATION	OPTIONS
T629LED	**10W** - 10W/1050lm **18W** - 18W/1890lm **30W** - 30W/3330lm **40W** - 40W/4335lm **57W** - 57W/5985lm	**30K** - 3000K **40K** - 4000K **50K** - 5000K	**UNV** - 120V-277V	**BZ**[1] - Bronze **MTO**[2] - Made to order **MGTO**[2] - Marine grade made to order	**G3** - 3nd Gen	**PC** - Photocell 120-277V **MW** - Microwave Motion Sensor **EM8W** - Emergency battery (Integral) WS40 **EM20W** - Emergency battery (Integral) WS120 **CEM15W** - Cold Pack Integral Emergency Battery **SDT** - Step down transformer **TRS** - Tamper Resistant Screw

Notes
1. Standard
2. RAL number required.

RAYON LIGHTING GROUP, INC. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

1517 N. ALAMEDA ST. COMPTON CA 90222 | TEL 323.446.2626 | FAX 323.446.2606 | WWW.RAYONLIGHTING.COM

T629LED

MEDIUM LED WALL PACK

DIMENSIONS

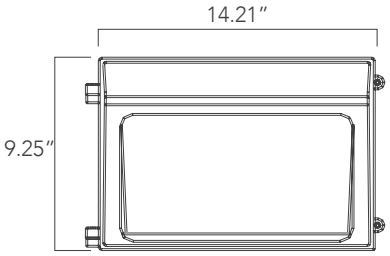



Weight: 7 lbs

T629LED KNOCK-OUT LOCATION



Left side Right side

FEED THROUGH CONDUIT ACCESS

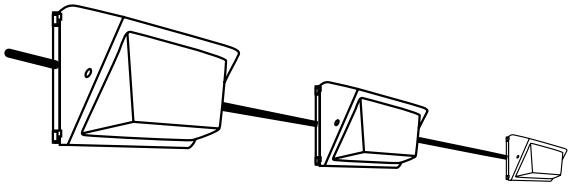

MOUNTING POINTS

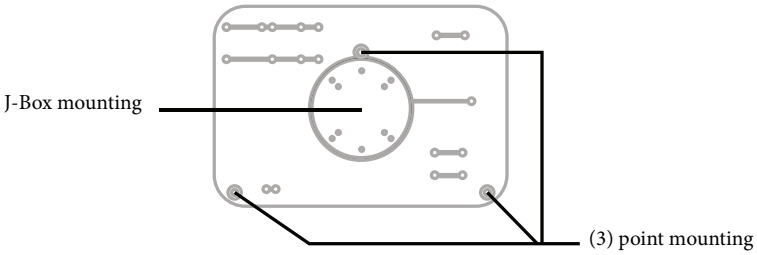

RAYON LIGHTING GROUP, INC. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

1517 N. ALAMEDA ST. COMPTON CA 90222 | TEL 323.446.2626 | FAX 323.446.2606 | WWW.RAYONLIGHTING.COM