



Wattage & Color Temperature
SELECTABLE

T633LEDB

SMALL LED FULL CUT-OFF WALL PACK

JOB INFORMATION

Type: _____
Catalog No: _____
Project Name: _____
Comments: _____
Prepared by: _____

T633LEDB

USE OF PRODUCT

The intended use of this product is for any outdoor commercial or industrial building accent, pedestrian walkways, public access areas, or recreation areas.

HOUSING

Rugged die cast aluminum housing with hinged frame. 1/2" Coin plugs with O-rings for conduit & photocell.

FINISH

Matt-finished, architectural bronze powdercoat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

OPTICS

Tempered UV coated flat lens provide outstanding performance, uniformity, and glare control.

LED

LED engine available in 3500K, 4000K, 5000K. Color temperature may be modified in field or preset by factory. LED Mounted to aluminum heat sink for maximum life output and thermal management.

DRIVER

Durable and long lasting LED driver operates at 120-277V and boasts a 90% power factor at 50 to 60 Hz with 0-10V Dimming Constant Current. Fixture available in two packages. LS1 (1300, 2600, 3900, 5200lm) & LS3 (3900, 7800, 11700, 15600lm). Watts may be modified in field or preset by factory available upon request -30°C Min Temp. 45°C Max Temp.

MOUNTING

Cast-in template for mounting directly over a 4" recessed outlet box or 1/2" surface conduit.

LISTINGS/COMPLIANCE

- DLC.
- UL - Listed for wet location.
- Dark Sky Compliant
- CEC compliant emergency driver.

PERFORMANCE DATA

Wattage	Delivered Lumens	Voltage	CRI
10W	1300lm	120-277V	70
20W	2600lm	120-277V	70
30W	3900lm	120-277V	70
40W	5200lm	120-277V	70

130 lm per watt

Wattage	Delivered Lumens	Voltage	CRI
30W	3900lm	120-277V	70
60W	7800lm	120-277V	70
90W	11700lm	120-277V	70
120W	15600lm	120-277V	70

130 lm per watt

BUG RATING

T633LEDB - WS40		
Back	Up	Glare
B2	U0	G1

T633LEDB - WS120		
Back	Up	Glare
B3	U0	G2




ORDERING INFO

SERIES	WATT/LUMENS	COLOR TEMPERATURE	VOLTAGE	OPTICS
T633LEDB	WS40 - Wattage Selectable (10W, 20W, 30W, 40W)	CTS - Color Temperature Selectable (3000K, 4000K, 5000K)	UNV - 120V-277V	T3 - Type 3
	S10W - Lumens set at 10W	S30K - Color Temp. set at 3000K		
	S20W - Lumens set at 20W	S40K - Color Temp. set at 4000K		
	S30W - Lumens set at 30W	S50K - Color Temp. set at 5000K		
	S40W - Lumens set at 40W			
	WS120 - Wattage Selectable (30W, 60W, 90W, 120W)			
	S30W - Lumens set at 30W			
	S60W - Lumens set at 60W			
	S90W - Lumens set at 90W			
S120W - Lumens set at 120W				
FINISH	OPTIONS			
BZ - Bronze	PC - Photocell 120-127V			
MTO - Made to order	MW - Microwave Motion Sensor			
MGTO - Marine grade made to order	EM8W - 8W Emergency Battery - Apply for WS40			
	EM20W - 20W Emergency Battery - Apply for WS120			
	CEM15W - Cold Pack Integral Emergency Battery			
	SP10 - Surge Protection 10KV			
	STD - 347/480 Step Down Transformer			
	TRS - Tamper Resistant Screw			

T633LEDB

SMALL LED FULL CUT-OFF WALL PACK

T633LEDB-WS40 DIMENSIONS

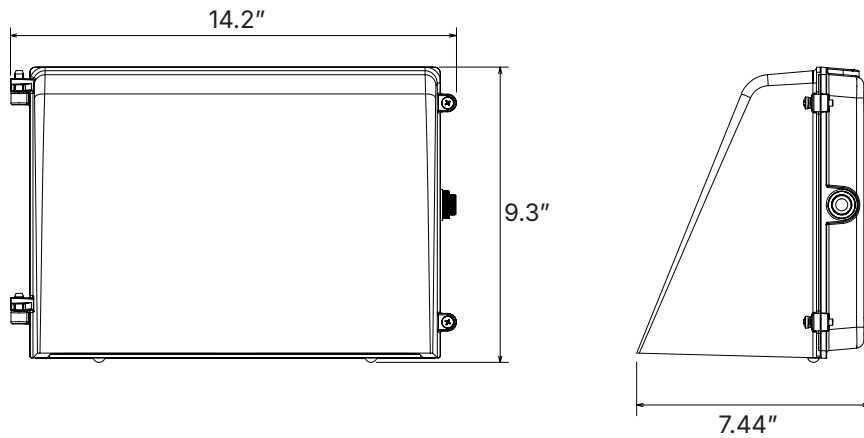

T633LEDB-WS120 DIMENSIONS

