



Wattage & Color Temperature
SELECTABLE

T633LEDB

SMALL LED FULL CUT-OFF WALL PACK

JOB INFORMATION

Type: _____
Catalog No: _____
Project Name: _____
Comments: _____
Prepared by: _____

T633LEDB

FEATURES

USE OF PRODUCT

The intended use of this product is for any outdoor commercial or industrial building accent, pedestrian walkways, public access areas, or recreation areas.

HOUSING

Rugged die cast aluminum housing with hinged frame. 1/2" Coin plugs with O-rings for conduit & photocell.

FINISH

Matt-finished, architectural bronze powdercoat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

OPTICS

Tempered UV coated flat lens provide outstanding performance, uniformity, and glare control.

LED

LED engine available in 3500K, 4000K, 5000K. Color temperature may be modified in field or preset by factory. LED Mounted to aluminum heat sink for maximum life output and thermal management.

DRIVER

Durable and long lasting LED driver operates at 120-277V and boasts a 90% power factor at 50 to 60 Hz with 0-10V Dimming Constant Current. Fixture available in two packages. LS1 (1300, 2600, 3900, 5200lm) & LS3 (3900, 7800, 11700, 15600lm). Watts may be modified in field or preset by factory available upon request -30°C Min Temp. 45°C Max Temp.

MOUNTING

Cast-in template for mounting directly over a 4" recessed outlet box or 1/2" surface conduit.

LISTINGS/COMPLIANCE

- DLC.
- UL - Listed for wet location.
- Dark Sky Compliant
- CEC compliant emergency driver.

PERFORMANCE DATA

| Wattage | Delivered Lumens | Voltage | CRI |
|---------|------------------|----------|-----|
| 10W | 1300lm | 120-277V | 70 |
| 20W | 2600lm | 120-277V | 70 |
| 30W | 3900lm | 120-277V | 70 |
| 40W | 5200lm | 120-277V | 70 |

130 lm per watt

| Wattage | Delivered Lumens | Voltage | CRI |
|---------|------------------|----------|-----|
| 30W | 3900lm | 120-277V | 70 |
| 60W | 7800lm | 120-277V | 70 |
| 90W | 11700lm | 120-277V | 70 |
| 120W | 15600lm | 120-277V | 70 |

130 lm per watt

BUG RATING

| T633LEDB - WS40 | | |
|-----------------|----|-------|
| Back | Up | Glare |
| B2 | U0 | G1 |

| T633LEDB - WS120 | | |
|------------------|----|-------|
| Back | Up | Glare |
| B3 | U0 | G2 |



ORDERING INFO

| SERIES | WATT/LUMENS | COLOR TEMPERATURE | VOLTAGE | OPTICS |
|----------|--|--|-----------------|-------------|
| T633LEDB | WS40 - Wattage Selectable (10W, 20W, 30W, 40W) S10W - Lumens set at 10W S20W - Lumens set at 20W S30W - Lumens set at 30W S40W - Lumens set at 40W | CTS - Color Temperature Selectable (3000K, 4000K, 5000K) S30K - Color Temp. set at 3000K S40K - Color Temp. set at 4000K S50K - Color Temp. set at 5000K | UNV - 120V-277V | T3 - Type 3 |
| | WS120 - Wattage Selectable (30W, 60W, 90W, 120W) S30W - Lumens set at 30W S60W - Lumens set at 60W S90W - Lumens set at 90W S120W - Lumens set at 120W | | | |

FINISH

BZ - Bronze
MTO - Made to order
MGTO - Marine grade made to order

OPTIONS


PC - Photocell 120-127V
MW - Microwave Motion Sensor
MSI - Standard PIR Motion Sensor Integral
MFI - FSP311 PIR Motion Sensor Integral
EM8W - 8W Emergency Battery - Apply for WS40
EM20W - 20W Emergency Battery - Apply for WS120
CEM15W - Cold Pack Integral Emergency Battery
SP10 - Surge Protection 10KV
STD - 347/480 Step Down Transformer
TRS - Tamper Resistant Screw



T633LEDB

SMALL LED FULL CUT-OFF WALL PACK

DIMENSIONS

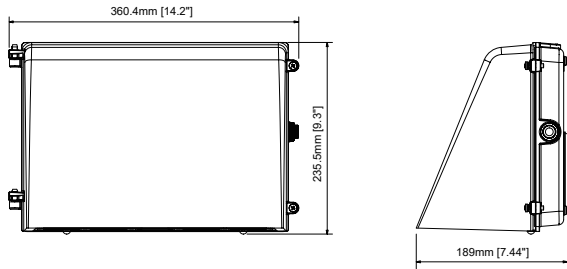

Weight: 7 lbs