

Wattage & Color Temperature SELECTABLE

JOB INFORMATION

Type: _____

Catalog No: _____

Project Name: _____

Comments: _____

_____

Prepared by: _____

T633LEDB

T634LEDB-M-WS100

MEDIUM LED FULL CUT-OFF WALL PACK

USE OF PRODUCT

The intended use of this product is for any outdoor commercial or industrial building accent, pedestrian walkways, public access areas, or recreation areas.

HOUSING

Rugged die cast aluminum housing with hinged frame. 0.87" Coin plugs for photocell and motion sensor

FINISH

Matt-finished, architectural bronze powdercoat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

OPTICS

Field-adjustable optics, allowing the light distribution to be modified in the field to T2, T3, or T4.

LED

LED engine available in 3000K, 4000K, 5000K in 80 CRI. Color temperature may be modified in field.

DRIVER

Durable and long lasting LED driver operates at 120-277V and boasts a 90% power factor at 50/60 Hz with 0-10V Dimming Constant Current. Fixture is Wattage selectable (60W, 80W, 100W). Wattage may be modified in field.

MOUNTING

Cast-in template for mounting directly over a 4" recessed junction box.

LISTINGS/COMPLIANCE

- UL - Listed for wet location.
- DLC qualified.
- Dark Sky Compliant.
- CEC compliant emergency driver.
- IP65.

PERFORMANCE DATA

Wattage	Delivered Lumens	Voltage	CRI
60W	8400lm	120-277V	80
80W	11200lm	120-277V	80
100W	14000lm	120-277V	80

140 lm per watt

*Detailed performance chart may be found on page 2

ORDERING INFORMATION

SERIES	SIZE	WATT/LUMENS	COLOR TEMPERATURE	VOLTAGE	DISTRIBUTION TYPE
T634LEDB	**M** - Medium	**WS100** - Wattage Selectable (60W, 80W, 100W) **S60W** - Wattage set at 60W **S80W** - Wattage set at 80W **S100W** - Wattage set at 100W	**CTS** - Color Temperature Selectable (3000K, 4000K, 5000K) **S30K** - Color Temp. set at 3000K **S40K** - Color Temp. set at 4000K **S50K** - Color Temp. set at 5000K	**UNV** - 120V-277V	**DS** - Distribution Selectable **ST2** - Set at Type II **ST3** - Set at Type III **ST4** - Set at Type IV

FINISH	INCLUDED	OPTIONS
BZ - Bronze **MTO** - Made to Order **MGTO** - Marine Grade Made to Order	**PC** - Photocell 120-127V	**MSI**[1] - Standard PIR Motion Sensor Integral **MSR** - Standard PIR Motion Sensor Remote **BB**[1] - Back Box **EM20W** - 20W Emergency Battery

Notes
1. Back Box is required for the MSI


T634LEDB-M-WS100


MEDIUM LED FULL CUT-OFF WALL PACK


DETAILED PEFRORMANCE CHART

WATTAGE	DISTRIBUTION TYPE	CRI	3000K	4000K	5000K	BUG
60W	T2	80	8351 lm	8896 lm	8776 lm	B3-U0-G2
	T3	80	8330 lm	8442 lm	8684 lm	B3-U0-G1
	T4	80	8158 lm	8541 lm	8597 lm	B2-U0-G1
80W	T2	80	10738 lm	11830 lm	11421 lm	B3-U0-G2
	T3	80	10862 lm	11564 lm	11603 lm	B3-U0-G2
	T4	80	10582 lm	11136 lm	11064 lm	B3-U0-G2
100W	T2	80	12674 lm	13956 lm	13495 lm	B3-U0-G2
	T3	80	13128 lm	13780 lm	13555 lm	B3-U0-G2
	T4	80	12609 lm	13299 lm	13246 lm	B3-U0-G2


DIMENSIONS

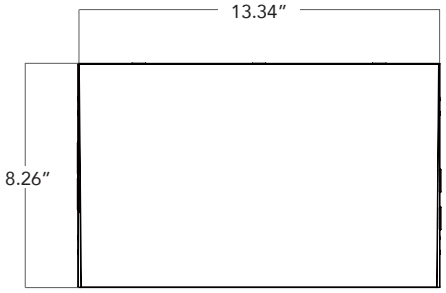





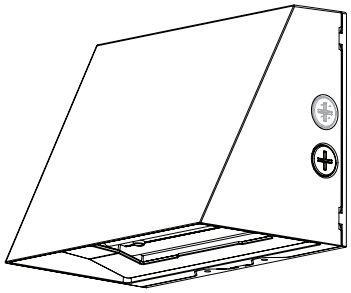

BACK BOX DIMENSIONS

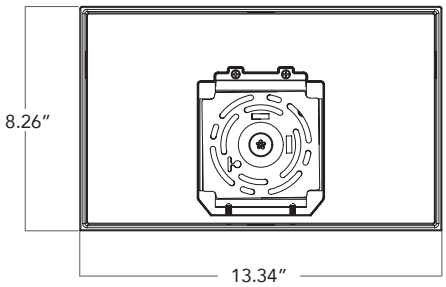



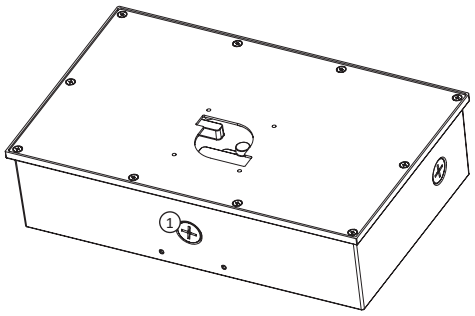


1. Integral motion sensor (order separately)

T634LEDB-M-WS100

MEDIUM LED FULL CUT-OFF WALL PACK

OPTIONS & SETTINGS

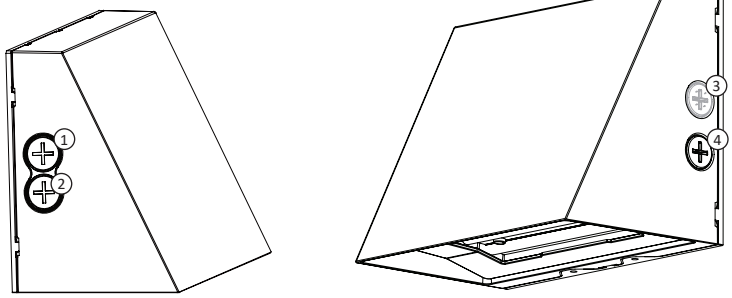

1. Distribution type & color temperature switch
2. Wattage selection switch
3. Photocell (included)
4. Remote motion sensor (order separately)

