

Wattage & Color Temperature SELECTABLE

JOB INFORMATION

Type: _____

Catalog No: _____

Project Name: _____

Comments: _____

_____

Prepared by: _____

T633LEDB

T634LEDB-S-WS40

SMALL LED FULL CUT-OFF WALL PACK

USE OF PRODUCT

The intended use of this product is for any outdoor commercial or industrial building accent, pedestrian walkways, public access areas, or recreation areas.

HOUSING

Rugged die cast aluminum housing with hinged frame. 0.87" Coin plugs for photocell and motion sensor

FINISH

Matt-finished, architectural bronze powdercoat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

OPTICS

Field-adjustable optics, allowing the light distribution to be modified in the field to T2, T3, or T4.

LED

LED engine available in 3000K, 4000K, 5000K in 80 CRI. Color temperature may be modified in field.

DRIVER

Durable and long lasting LED driver operates at 120-277V and boasts a 90% power factor at 50/60 Hz with 0-10V Dimming Constant Current. Fixture is Wattage selectable (20W, 30W, 40W). Wattage may be modified in field.

MOUNTING

Cast-in template for mounting directly over a 4" recessed junction box.

LISTINGS/COMPLIANCE

- UL - Listed for wet location.
- DLC qualified.
- Dark Sky Compliant.
- CEC compliant emergency driver.
- IP65.

PERFORMANCE DATA

Wattage	Delivered Lumens	Voltage	CRI
20W	3500lm	120-277V	80
30W	4200lm	120-277V	80
40W	5600lm	120-277V	80

140 lm per watt

*Detailed performance chart may be found on page 2

ORDERING INFO

SERIES	SIZE	WATT/LUMENS	COLOR TEMPERATURE	VOLTAGE	DISTRIBUTION TYPE
T634LEDB	**S** - Small	**WS40** - Wattage Selectable (20W, 30W, 40W)	**CTS** - Color Temperature Selectable (3000K, 4000K, 5000K)	**UNV** - 120V-277V	**DS** - Distribution Selectable
		S20W - Wattage set at 20W	**S30K** - Color Temp. set at 3000K		**ST2** - Set at Type II
		S30W - Wattage set at 30W	**S40K** - Color Temp. set at 4000K		**ST3** - Set at Type III
		S40W - Wattage set at 40W	**S50K** - Color Temp. set at 5000K		**ST4** - Set at Type IV

FINISH	INCLUDED	OPTIONS
BZ - Bronze	**PC** - Photocell 120-127V	**MSR** - Standard PIR Motion Sensor Remote
MTO - Made to Order		**EM8W** - 8W Emergency Battery
MGTO - Marine Grade Made to Order		


T634LEDB-S-WS40

SMALL LED FULL CUT-OFF WALL PACK

DETAILED PEFRORMANCE CHART

WATTAGE	DISTRIBUTION TYPE	CRI	3000K	4000K	5000K	BUG
20W	T2	80	2999 lm	3156 lm	3152 lm	B1-U0-G1
	T3	80	2917 lm	3036 lm	3048 lm	B1-U0-G1
	T4	80	2867 lm	2970 lm	3011 lm	B1-U0-G1
30W	T2	80	4157 lm	4427 lm	4370 lm	B2-U0-G1
	T3	80	4049 lm	4243 lm	4251 lm	B2-U0-G1
	T4	80	4006 lm	4131 lm	4159 lm	B2-U0-G1
40W	T2	80	5403 lm	5833 lm	5701 lm	B2-U0-G1
	T3	80	5318 lm	5619 lm	5615 lm	B2-U0-G1
	T4	80	5147 lm	5405 lm	5457 lm	B2-U0-G1

DIMENSIONS

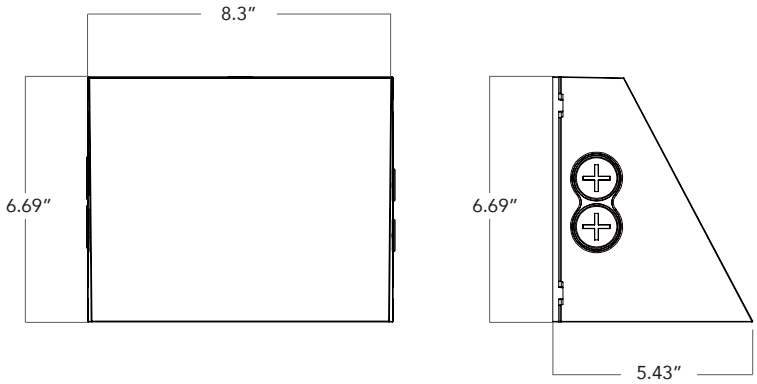


RAYON LIGHTING GROUP, INC. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.


1517 N. ALAMEDA ST. COMPTON CA 90222 | TEL 323.446.2626 | FAX 323.446.2606 | WWW.RAYONLIGHTING.COM

T634LEDB-S-WS40

SMALL LED FULL CUT-OFF WALL PACK

OPTIONS & SETTINGS



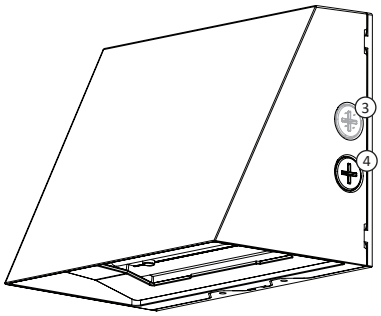

1. Distribution type & color temperature switch
2. Wattage selection switch
3. Photocell (included)
4. Remote motion sensor (order separately)

