



T722LEDB

10.5" X 10.5" SQUARE LED CANOPY
AND GARAGE LUMINAIRE

JOB INFORMATION

Type: _____
 Catalog No: _____
 Project Name: _____
 Comments: _____
 Prepared by: _____

T722LED

FEATURES

USE OF PRODUCT

The intended use of this product is in parking areas, entrances, walkways, underpasses, loading docks, or recreation areas.

HOUSING

Die-cast aluminum housing with knockout (1/2" Thread) located on 2 sides. Smooth back structure prevents accumulation of water, dust and insects.

FINISH

Matt-finished, architectural bronze powdercoat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

OPTICS

Clear glass optical lens. Sealed by adhesive which prohibits entrance of outside contaminants.

LED

High output LEDs offer a minimum estimated operating life of 50,000 hours, Color temperature selectable at 3000K, 4000K

and 5000K with CRI>70. Color temperature may be modified in the field. LEDs placed on high performance aluminum heatsink for reduced junction temperatures and extended life.

DRIVER

Durable and long lasting LED dimmable driver operates at 120-347V; -40°C Min Temp. to 40°C Max Temp.

MOUNTING

T722LED may be pendant hung (3/4 threads), surface mount and J-box mounted.

WEIGHT

5.51 Lbs

LISTINGS/COMPLIANCE

- cULus listed
- DLC Listed



WATTAGE/LUMEN CHART

WS4

Wattage	Lumens	Voltage
23W	3220lm	120-347V
34W	4760lm	120-347V
45W	6300lm	120-347V

WS7

Wattage	Lumens	Voltage
45W	3900lm	120-347V
55W	7700lm	120-347V
70W	9800lm	120-347V

ORDERING INFO

SERIES	WATT/LUMENS	VOLTAGE	COLOR TEMPERATURE	FINISH	MOUNTING	OPTIONS
T722LED	WS4 - Wattage Selectable (23W,34W,45W) 23 - Set at 23W 34 - Set at 34W 45 - Set at 45W WS7 - Wattage Selectable (45W,55W,70W) 45 - Set at 45W 55 - Set at 55W 70 - Set at 70W	UNV - 120-347V	CTS - Color Temperature Selectable (3000K, 4000K, 5000K)	BZ ¹ - Bronze MTO ² - Made to order MGTO ² - Marine grade made to order	S - Surface Mount P ³ - Pendant hung	EM - Emergency battery MW - Microwave Motion sensor


Notes

1. Standard
2. RAL number required.
3. 18" standard pendant.

T722LEDB

10.5" X 10.5" SQUARE LED CANOPY
AND GARAGE LUMINAIRE

DIMENSIONS

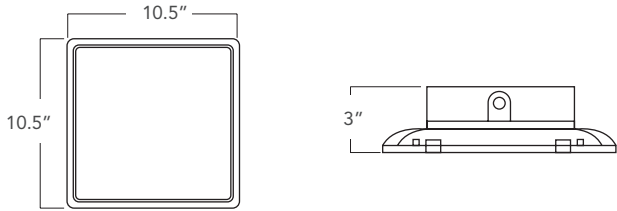

THREE- PROFILES



KNOCK-OUT LOCATION

