



T722LEDB

10.5" X 10.5" SQUARE LED CANOPY
AND GARAGE LUMINAIRE

JOB INFORMATION

Type: _____
 Catalog No: _____
 Project Name: _____
 Comments: _____
 Prepared by: _____

T722LED

FEATURES

USE OF PRODUCT

The intended use of this product is in parking areas, entrances, walkways, underpasses, loading docks, or recreation areas.

HOUSING

Die-cast aluminum housing with knockout (1/2" Thread) located on 2 sides. Smooth back structure prevents accumulation of water, dust and insects.

FINISH

Matt-finished, architectural bronze powdercoat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

OPTICS

Clear glass optical lens. Sealed by adhesive which prohibits entrance of outside contaminants.

LED

High output LEDs offer a minimum estimated operating life of 50,000 hours, Color temperature selectable at 3000K, 4000K

and 5000K with CRI>70. Color temperature may be modified in the field. LEDs placed on high performance aluminum heatsink for reduced junction temperatures and extended life.

DRIVER

Durable and long lasting LED dimmable driver operates at 120-347V; -40°C Min Temp. to 40°C Max Temp.

MOUNTING

T722LED may be pendant hung (3/4 threads), surface mount and J-box mounted.

WEIGHT

5.51 Lbs

LISTINGS/COMPLIANCE

- cULus listed
- DLC Listed



WATTAGE/LUMEN CHART

WS45

Wattage	Lumens	Voltage
23W	3220lm	120-347V
34W	4760lm	120-347V
45W	6300lm	120-347V

WS70

Wattage	Lumens	Voltage
45W	3900lm	120-347V
55W	7700lm	120-347V
70W	9800lm	120-347V

BUG RATING

WS45

B	U	G
2	0	1

WS70

B	U	G
2	0	1

ORDERING INFO

SERIES	WATT/LUMENS	COLOR TEMPERATURE	VOLTAGE
T722LED	WS45 - Wattage Selectable (23W,34W,45W) S23W - Set at 23W S34W - Set at 34W S45W - Set at 45W WS70 - Wattage Selectable (45W,55W,70W) S45W - Set at 45W S55W - Set at 55W S70W - Set at 70W	CTS - Color Temperature Selectable (3000K, 4000K, 5000K) S30K - Set at 3000K S40K - Set at 4000K S50K - Set at 5000K	UNV - 120-347V


MOUNTING	FINISH	OPTIONS
SM - Surface Mount PH ³ - Pendant hung	BZ ¹ - Bronze MTO ² - Made to order MGTO ² - Marine grade made to order	PC - Photocell 120-277V MSR - Standard PIR Motion Sensor Remote MFR - FSP311 PIR Motion Sensor Remote EM8W - Emergency battery 8W (Apply for WS45) EM20W - Emergency battery 20W (Apply for WS70) CEM15W - Cold Pack Integral Emergency Battery FC - Dark sky full cut-off shield BS - Bird Spikes

Notes
 1. Standard
 2. RAL number required.
 3. 18" standard pendant.

T722LEDB

10.5" X 10.5" SQUARE LED CANOPY
AND GARAGE LUMINAIRE

DIMENSIONS

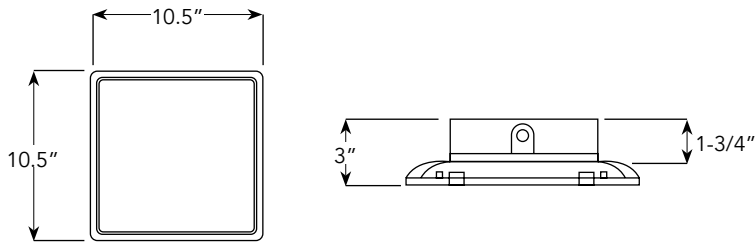

THREE- PROFILES



KNOCK-OUT LOCATION

