



# T730LEDB

SQUARE SLIM LED CANOPY

## JOB INFORMATION

Type: \_\_\_\_\_  
Catalog No: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Comments: \_\_\_\_\_  
Prepared by: \_\_\_\_\_

T730LEDB

## FEATURES

### USE OF PRODUCT

The intended use of this product is in parking areas, entrances, walkways, underpasses, loading docks, or recreation areas.

### HOUSING

Sealed die-cast aluminum housing with knockout located on side.

### FINISH

Matt-finished, architectural bronze powdercoat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

### OPTICS

One-piece white powdercoat reflector with polycarbonate lens. Lens is sealed by one-piece silicon gasket prohibits entrance of outside contaminants.

### LED

High output LEDs offer a minimum estimated operating life of 50,000 hours in 4000K, 5000K with CRI>70; LEDs placed on high performance aluminum heatsink for reduced junction temperatures and extended life.

### DRIVER

Durable and long lasting LED driver operates at 120-277V with 0-10V dimming driver, -40°C Min Temp. +40°C Max Temp.

### LISTINGS/COMPLIANCE

- UL - Suitable for wet locations.
- DLC

## ORDERING INFO


SERIES	WATT/LUMENS	VOLTAGE	COLOR TEMPERATURE	FINISH	OPTIONS
T730LED	40 - 40W/5450lm 60 - 60W/8000lm	UNV <sup>1</sup> - 120V-277V 347 - 347-480V	40 - 4000K 50 - 5000K	BZ <sup>2</sup> - Bronze MTO <sup>3</sup> - Made to order MGTO <sup>3</sup> - Marine grade made to order	MS - Motion sensor (Bi-Level) EM - Emergency battery

### Notes

1. DLC only available in 120-277V
2. Standard
3. RAL number required.

# T730LEDB

## DIMENSIONS

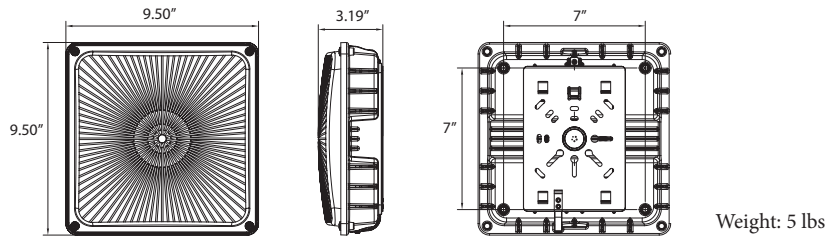

## EMERGENCY BATTERY

