



Wattage & Color Temperature
SELECTABLE

T865LEDB

CLEAR ROUND FLAT TOP BOLLARD CONE

JOB INFORMATION

Type: _____
Catalog No: _____
Project Name: _____
Comments: _____
Prepared by: _____

T865LEDB

FEATURES

USE OF PRODUCT

The intended use of this product is for pathways, parking lots, plazas, entrance ways, parks, and as landscape accents.

HOUSING

Extruded aluminum housing with flush mounting base.

FINISH

Weather resistant, matte-finished powder coat process for advanced protection in severe environments over a precise chromate conversion coating. Available in standard dark polyester bronze finish for impact, corrosion, and UV resistance. Consult factory for made to order architectural finishes.

OPTICS

LED engine allows for color temperature selectability. Available in 3000K, 4000K, or 5000K. Color temperature may be modified in the field or preset by factory. LED mounted to aluminum heat sink for maximum life output and thermal management. LED color rendering index is 70 CRI.

DRIVER

Durable and long lasting LED driver operates at 120-277V and boasts a 90% power factor at 50 to 60 Hz with 0-10V Dimming Constant Current. Fixture is wattage selectable (10W, 16W, 21W, 26W). Watts may be modified in the field or preset by factory. -40°C Min Temp to 45°C Max Temp.

CONTROLS

Fixture may be controlled by photocell.

MOUNTING

- Mounting kit with anchor bolts are included.
- Bollard must be mounted on a concrete base. (Supplied by others)

LISTINGS/COMPLIANCE

- UL - Listed for wet location (IP65)
- DLC



WATTAGE/LUMEN CHART

Wattage	Delivered Lumens	CCT Selectable	CRI
10W	1300lm	3000K, 4000K, 5000K	70
16W	1950lm	3000K, 4000K, 5000K	70
21W	2500lm	3000K, 4000K, 5000K	70
26W	3000lm	3000K, 4000K, 5000K	70

ORDERING INFO

SERIES	WATTAGE	COLOR TEMPERATURE	VOLTAGE	FINISH	OPTIONS
T865LEDB	WS26 - Wattage Selectable (10W, 16W, 21W, 26W) S10W - Set at 10W S16W - Set at 16W S21W - Set at 21W S26W - Set at 26W	CTS - Color Temperature Selectable (3000K, 4000K, 5000K) S30K - Set at 3000K S40K - Set at 4000K S50K - Set at 5000K	UNV - 120V-277V	BZ ¹ - Bronze MTO ² - Made to Order MGTO ² - Marine Grade Made To Order	EM8W - Emergency Battery 8W BC - Base Cover


Notes

1. Standard finish.
2. RAL number required.

T865LEDB

CLEAR ROUND FLAT TOP BOLLARD CONE

BOLLARD DIMENSIONS

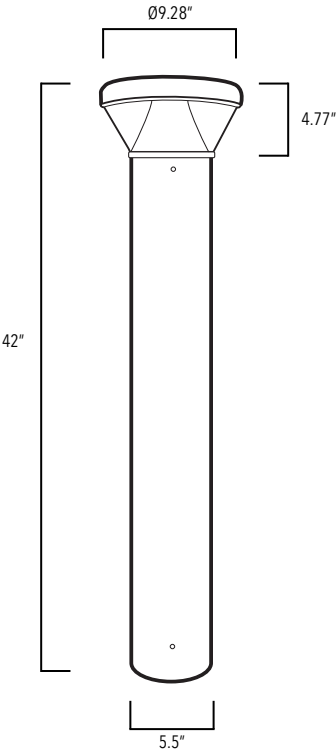

OPTIONAL BASE COVER DIMENSIONS

