

## SAFETY TIPS

**IMPORTANT : READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN FOR FUTURE REFERENCE**

### GENERAL:

Upon receipt of the fixture, thoroughly inspect for any freight damage which should be brought to the attention of the delivery carrier. Compare the catalog description listed on the packing slip with the fixture label on the housing to assure you have received the correct material.

### SAFETY:

This fixture must be wired in accordance with the National Electrical Code and applicable local codes and ordinances. Proper grounding is required to insure personal safety. Carefully observe grounding procedure under installation section.

### WARNING:

Make certain power is OFF before starting installation or attempting any maintenance. Risk of fire/electric shock. If not qualified, consult an electrician.


- RISK OF ELECTRIC SHOCK—Disconnect power at fuse or circuit breaker before installing or servicing
- RISK OF BURN—Disconnect power and allow fixture to cool before servicing
- RISK OF PERSONAL INJURY—Fixture may become damaged and/or unstable if not installed properly.
- DO NOT mount luminaire within 6" of a combustible surface.
- DO NOT handle luminaire by the glass.
- DO NOT touch LEDs.

## FAILURE TO FOLLOW INSTRUCTIONS MAY RESULT IN SERIOUS INJURY OR DEATH

## HOW TO INSTALL


### 1. Cutting Hole

Cut out a hole according to the proper diameter in the existing ceiling. (as shown below)

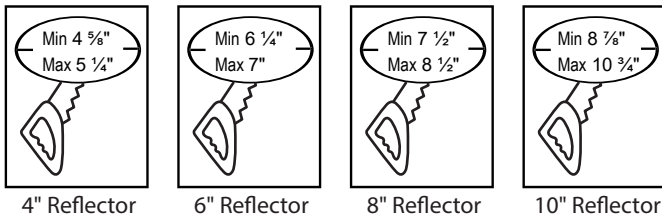


### 2. Electrical Wiring

Open Junction Box cover and remove one of the knockouts on the side of the Junction Box. Connect all the wires of the same color with each other.

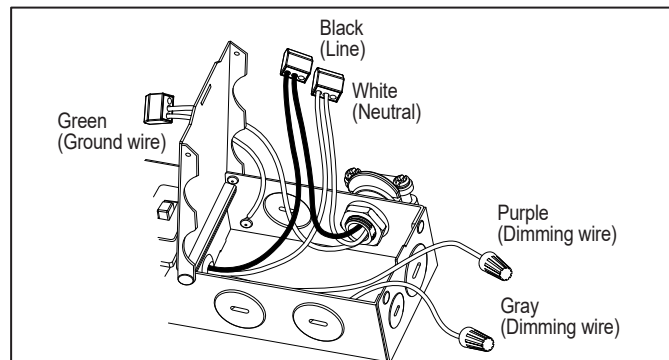


### 3. Assembly instruction on LED Module, Reflector, and J-box with Driver

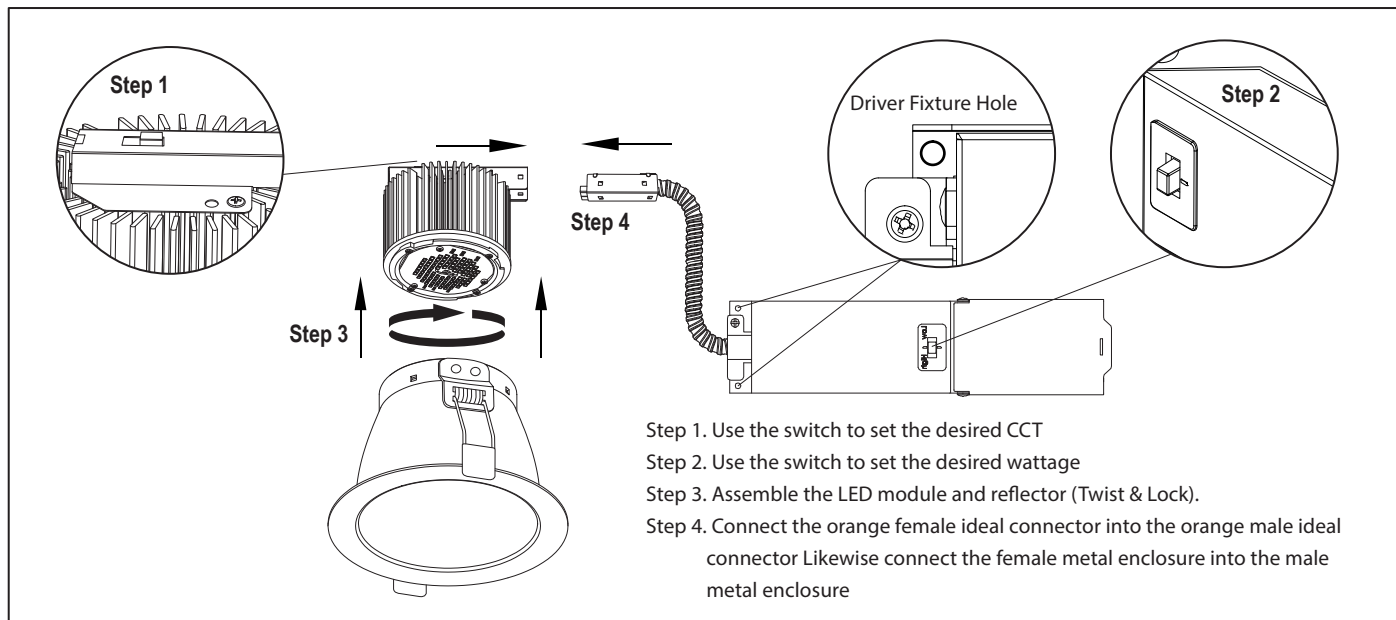


#### 4. Ceiling Mounting

Put Junction Box into the ceiling first. Then fix light fixture onto ceiling with friction Spring clips.

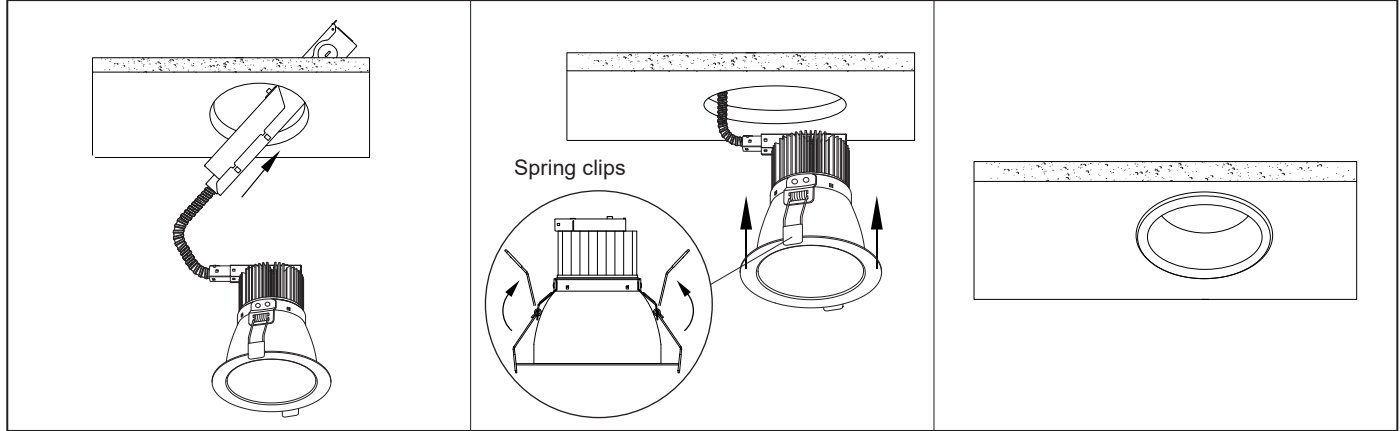

#### 0-10V Dimmer Switch

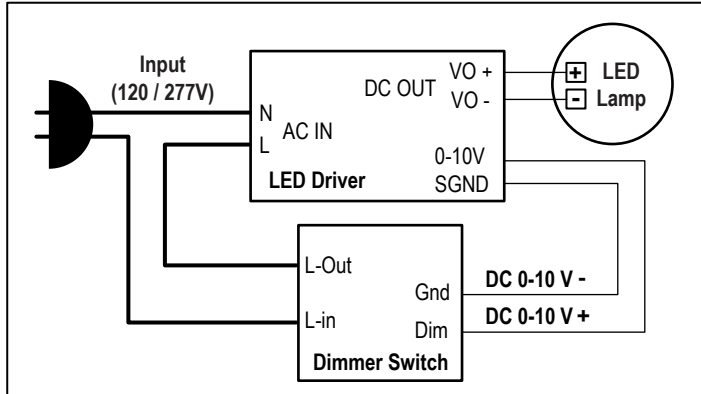

#### LIST OF COMPATIBLE DIMMERS:

Mfr	Model #	Dimming Rate
Lutron	NFTV	0 - 100%
Lutron	NTSTV-DV	0 - 100%
Legrand	CD4FBLW	0 - 100%
Leviton	1P710-DL	0 - 100%