REC4S

4" Economy Series
1000 Lumen LED Downlight

PROJECT:

MODEL #:


LOCATION:

CONTACT:

4" Economy Series



DIMENSIONS

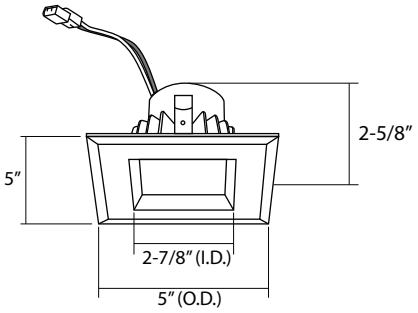

TITLE24 Compliant JA8 Compliant

USE OF PRODUCT
The REC4S series is ideal product for energy efficient lighting in standard 4" existing, remodel, or new construction housings. This product may be used in hospitality, health care, commercial,retail and residential applications. The REC Series will reduce energy consumption, emits little heat, and reduces cooling loads for added costs savings. Approximately 75% in energy savings compared to incandescent light source.

REC4S FEATURES
- Lumens: 1000 Lumens
- Input Power: 14W
- Frequency: 50/60Hz
- Voltage: 120V
- Color Temperature: 3000K
- CRI: 90+
- Finish: Smooth White
- Trim: Square
- Wet Location Listed

REC CONSTRUCTION
White painted Diecast body is appropriate for heat dissipation.

ELECTRICAL CONNECTION
Optional edison screw base for easy retrofit of incandescent housing. GU24 socket adaptor available for retrofit applications sold separately.

DIMMING
The REC Series is compatible with most industry standard dimmers. Dimming to 5% with most dimmers(120V only)

MOUNTING
3 Tension Clips pre-installed on unite for easy installation

LABELS/COMPLIANCE
- cULus Listed for wet location listed
- Title 24 & JA8 compliant
- Energy star qualified
- Tested in accordance with IESNA LM79 & LM80

ORDERING INFO

Series	Lumens	Color Temp.	Finish
REC4S - 4" Economy Series	**10L** - 1000Lumens	**30K** - 3000K	**W** - White

RHL4-ICAT

4" IC Air-tight
New Construction LED Housing


PROJECT:

MODEL #:


LOCATION:


CONTACT:

4" IC Air-Tight New Construction LED Housing

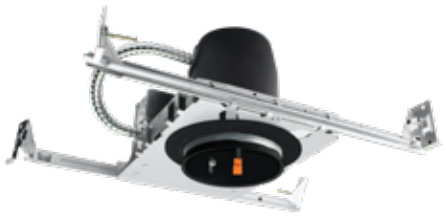

DIMENSIONS





USE OF PRODUCT

The RHL4-ICAT is the ideal product for general purpose recessed LED housing for residential, commercial, hospitality, health care, restaurant and retail applications. This product is compatible with REC Series in round or square.

CONSTRUCTION

- Minimum Clearance Rated for IC/ Non - IC application. "IC" or insulated ceiling housings are rated for direct contact with insulation. No minimum clearance is required.
- Ceiling Thickness Up to 1¼.
- Bar Hangers Bar Hangers are adjustable from 13-5/8 to 25" and can be repositioned to 90° on plaster frame. Pre-installed"real nail" easily installs in regular lumber, engineered lumber
- Junction Box Junction box is listed for through branch circuit wiring and contains seven 7/8" knockouts and four ROMEX pryouts with Romex cable clamp. Ground wire provided on J-Box.
- New Construction Frame Galvanized steel construction.

MODULE COMPATIBILITY

RHL4-ICAT is compatible with the REC Series in round or square.

LABELS/COMPLIANCE

cUL listed for Wet location
Certified under ASTM-283 for Air-Tight Construction
Title 24 Compliant

ORDERING INFO

RHL4-ICAT

Series

RHL4-ICAT - 4" IC Air-Tight New Construction LED Housing

RAYON LIGHTING

www.rayonlighting.com
info@rayonlighting.com

tel: 323.446.2626
fax:323.446.2606

Specification and product availability subject to change without notice

RHL4R-ICAT

4" IC Air-tight
Remodel LED Housing

PROJECT:


MODEL #:


LOCATION:

CONTACT:



DIMENSIONS

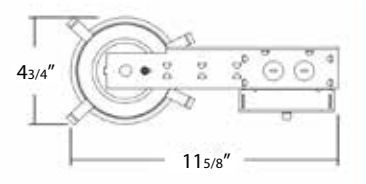



USE OF PRODUCT

The RHL4R-ICAT is the ideal product for general purpose recessed LED housing for residential, commercial, hospitality, health care, restaurant and retail applications. This product is compatible with the REC Series in round or square.

CONSTRUCTION

- Minimum Clearance "IC" or insulated ceiling housings are rated for direct contact with insulation. No minimum clearance is required.
- CEILING THICKNESS Up to 1¼.
- BAR HANGERS Bar Hangers are adjustable from 13-5/8"to 25" and can be repositioned to 90° on plaster frame. Pre-installed"real nail" easily installs in wood or composite joists.
- JUNCTION BOX Junction box is listed for through branch circuit wiring and contains seven 7/8 knockouts and four ROMEX pryouts with Romex cable clamp. Ground wire provided on J-Box.
- REMODEL FRAME Galvanized steel construction

MODULE COMPATIBILITY

RHL4R-ICAT is compatible with the REC Series in round or square.

LABELS/COMPLIANCE

cUL listed for Wet location
Certified under ASTM-283 for Air-Tight Construction
Title 24 Compliant

ORDERING INFO

RHL4R-ICAT

Series

RHL4R-ICAT - 4" IC Air-Tight Remodel LED Housing

4" IC Air-Tight Remodel LED Housing

www.rayonlighting.com
info@rayonlighting.com
tel: 323.446.2626
fax:323.446.2606

Specification and product availability subject to change without notice